

WAAS CH 69205 W17A	APP CRS 170°	Rwy Ldg TDZE 763 Apt Elev 763
--	------------------------	---

RNAV (GPS) RWY 17

HURON COUNTY MEML (BAX)

RNP APCH - GPS.


▼

▲

Baro-VNAV NA when using MBS altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use MBS altimeter setting: increase LPV DA to 1205 feet and all visibilities ¾ SM; increase LNAV/VNAV DA to 1482 feet; increase all MDAs 140 feet and LNAV visibility Cat C ¾ SM. Rwy 17 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 3000 direct AREBE and hold.

AWOS-3P 118.6	CLEVELAND CENTER 127.7 290.425	UNICOM 123.075 (CTAF) 0
-------------------------	--	-----------------------------------

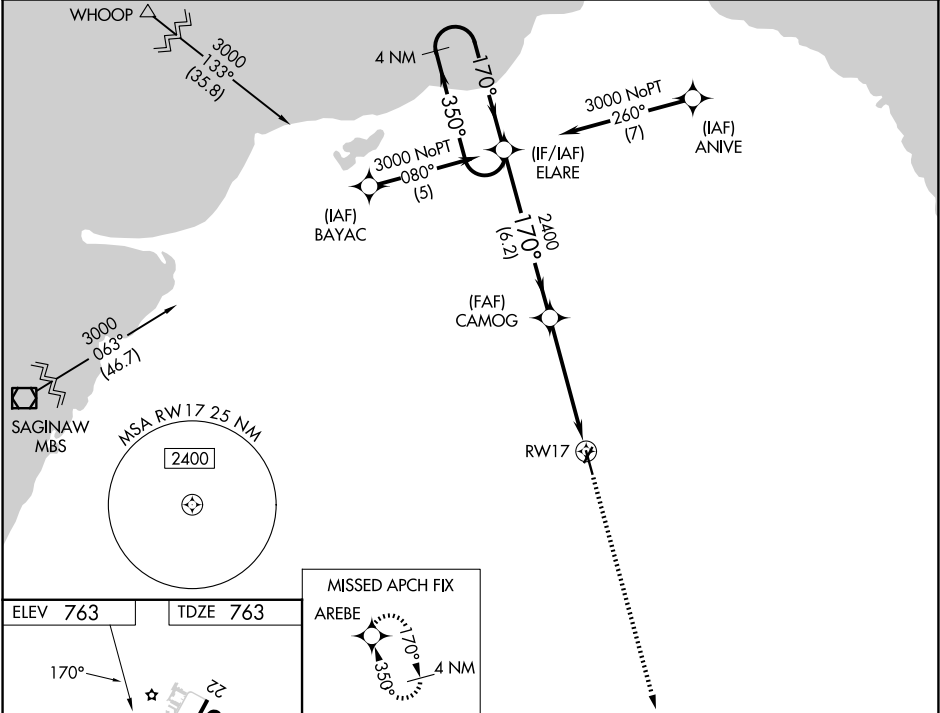

ELEV 763	TDZE 763	MISSED APCH FIX AREBE 3000 170° 4 NM	4 NM Holding Pattern ELARE 3000 350° 170° GP 3.00° TCH 40	3000 ↑ AREBE ✧
REIL Rws 17 and 35 MIRL Rws 4-22 and 17-35		RW17 2400 6.2 NM 4.9 NM		
CATEGORY	A	B	C	D
LPV DA	1075-1	312 (400-1)		NA
LNAV/VNAV DA	1352-2	589 (600-2)		NA
LNAV MDA	1220-1	457 (500-1)	1220-1 ¾ 457 (500-1 ¾)	NA