

APP CRS
121°

Rwy Idg
5000

TDZE
1086

Apt Elev
1086

RNAV (GPS) RWY 12

MONROE MUNI (EFT)

RNP APCH-GPS.



▼

▲

VDP NA when using Albetus altimeter setting. When local altimeter setting not received, use Albetus altimeter setting and increase all MDA 100 feet, increase LNAV Cat C/D and Circling Cat C visibility ¼ mile. Rwy 12 helicopter visibility reduction below ¾ SM NA. Circling to Rwy 2-20 NA at night.

MISSED APPROACH:
Climb to 3000 direct
FALKN and on track
143° to DAVIS
and hold.

AWOS-3 118.375	ROCKFORD APP CON 126.0 327.0	UNICOM 123.05 (CTAF) 0
--------------------------	--	----------------------------------

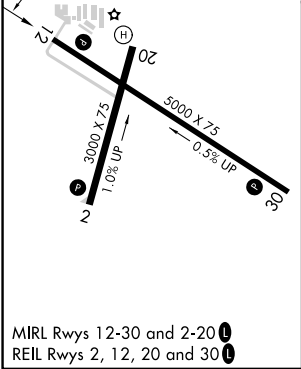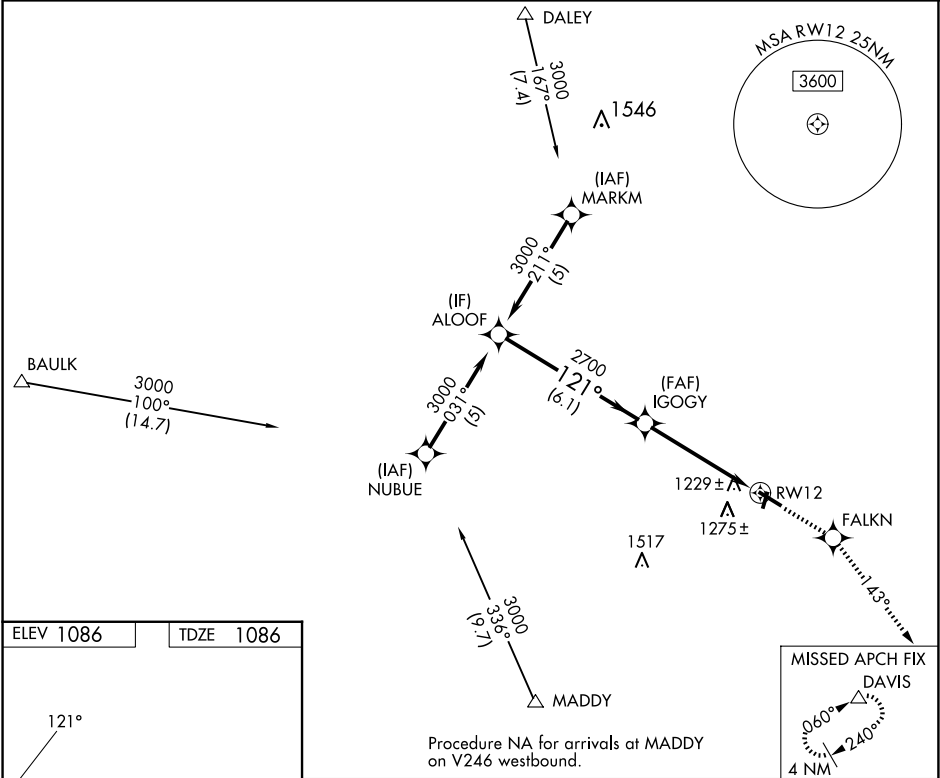

Procedure Turn NA	ALOOF	3000	121°	IGOXY	2700	3.04° TCH 40	1.1 NM to RW12	RW12	4 NM
CATEGORY	A	B	C	D					
LNAV MDA	1480-1	394 (400-1)			1480-1¼	394 (400-1¼)			
CIRCLING	1540-1 454 (500-1)	1640-1 554 (600-1)	1640-1½ 554 (600-1½)	1640-2 554 (600-2)					