

WAAS
CH **88239**
W05B

APP CRS
047°

Rwy Ldg
TDZE
Apt Elev
5000
8
8

RNAV (GPS) Y RWY 5
NAPLES MUNI (APF^V)

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 6°C or above 50°C.

MISSED APPROACH: Climb to 500 then climbing right turn to 2100 direct EVRGD and hold.

ATIS 134.225	FORT MYERS APP CON★ 119.75 371.85 (W) 124.125 371.85 (E)	NAPLES TOWER★ 128.5 (CTAF) 0	GND CON 121.6
------------------------	--	--	-------------------------

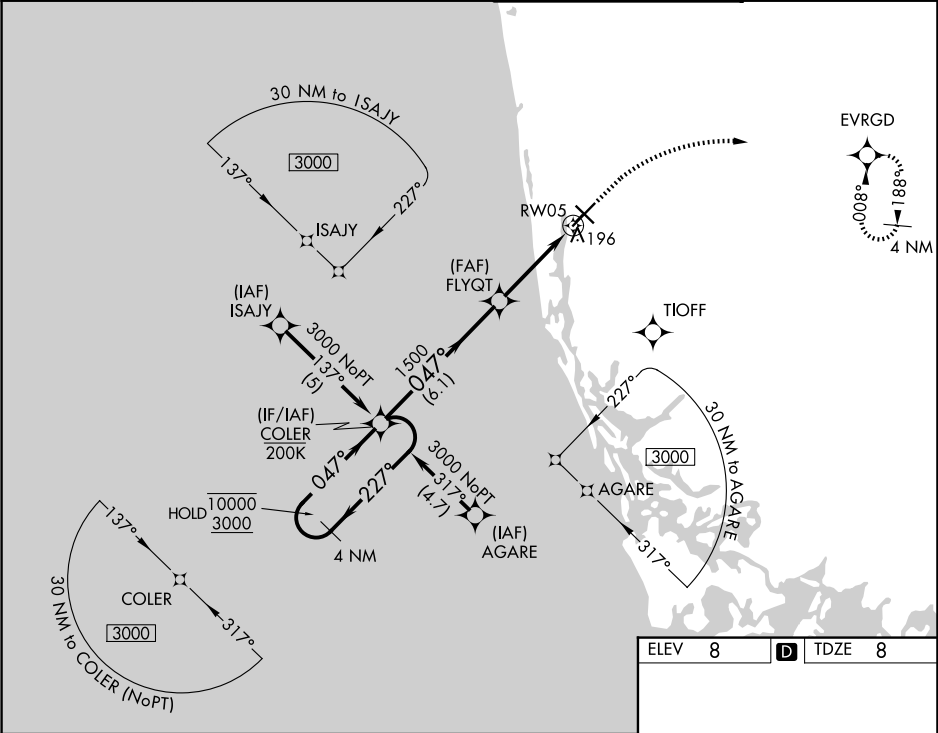

4 NM
Holding Pattern

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.50/TCH 31).

500 2100 EVRGD

10000 3000

←227°

047°→

GP 3.50°
TCH 40

COLER

FLYQNT

1500

1.1 NM to RWY05

RWY05

CATEGORY

A

B

C

D

LPV DA

278-1

270 (300-1)

LNAV/VNAV DA

357-1

349 (400-1)

LNAV MDA

460-1

452 (500-1)

460-1³/₈

452 (500-1³/₈)

CIRCLING

500-1

492 (500-1)

620-1³/₄

612 (700-1³/₄)

760-2¹/₂

752 (800-2¹/₂)

REIL Rwy 5, 14, 23 and 32

MRL Rwy 5-23 and 14-32