

WAAS
CH **93920**
W31A

APP CRS
308°

Rwy Ldg
TDZE **1123**
Apt Elev **1123**

RNAV (GPS) RWY 31

LITTLE FALLS/MORRISON COUNTY-LINDBERGH FLD (LXL)

RNP APCH - GPS.


▼

Baro-VNAV NA when using STC altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 32°C. Rwy 31 visibility reduction below ¾ SM by helicopters NA. When local altimeter setting not received, use STC altimeter setting and increase all DAs 76 feet and all MDAs 80 feet; increase LPV all Cats visibility ½ SM and LNAV/VNAV all Cats, LNAV Cat C/D and Circling Cat C/D visibility ¼ SM. Circling Rwy 18, 36 NA.

⚠

MISSED APPROACH:
Climb to 3000 direct ZUGUT and hold.

AWOS-3 119.45	MINNEAPOLIS CENTER 118.05 239.0	GCO 121.725	UNICOM 122.8 (CTAF) 0
-------------------------	---	-----------------------	---------------------------------

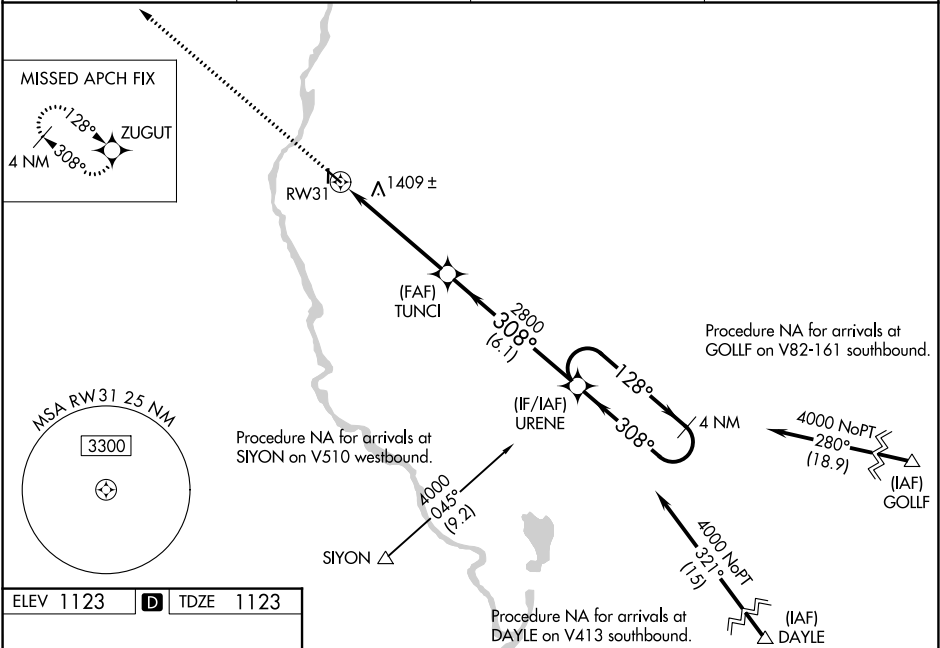

ELEV 1123

D

TDZE 1123

81

2858 X 60

36

4010 X 75

308°

LIRL Rwy 18-36 0

MIRL Rwy 13-31 0

REIL Rws 13 and 31 0

3000

ZUGUT

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).

4 NM

Holding Pattern

TUNCI

2800

URENE

2800

308°

128°

4000

GP 3.00°

TCH 45

5.1 NM

6.1 NM

CATEGORY	A	B	C	D
LPV DA	1517-1⅓		394 (400-1⅓)	
LNAV/VNAV DA	1749-2¼		626 (700-2¼)	
LNAV MDA	1660-1	537 (600-1)	1660-1½	537 (600-1½)
CIRCLING	1700-1 577 (600-1)	1800-1 677 (700-1)	1840-2 717 (800-2)	2000-2¾ 877 (900-2¾)