

WAAS CH 61216 W20A	APP CRS 200°	Rwy Idg 6100 TDZE 3786 Apt Elev 3788
--	------------------------	---

RNAV (GPS) RWY 20

HEREFORD MUNI (HRX)


RNP APCH - GPS.

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. When local altimeter setting not received, use AMA altimeter setting: increase LPV DA to 4098 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 4232 feet and all visibilities ¼ SM; increase all MDAs 120 feet and LNAV visibility Cats C and D ½ SM, increase Circling visibility Cat C ½ SM and Cat D ¼ SM. Circling NA to Rwy's 14 and 32. Baro-VNAV and VDP NA when using AMA altimeter setting.

MISSED APPROACH:
Climb to 6000 direct
LEMGE and hold.

AWOS-3 118.05	AMARILLO APP CON ★ 119.5 307.0	UNICOM 122.8 (CTAF) 0
-------------------------	--	---------------------------------

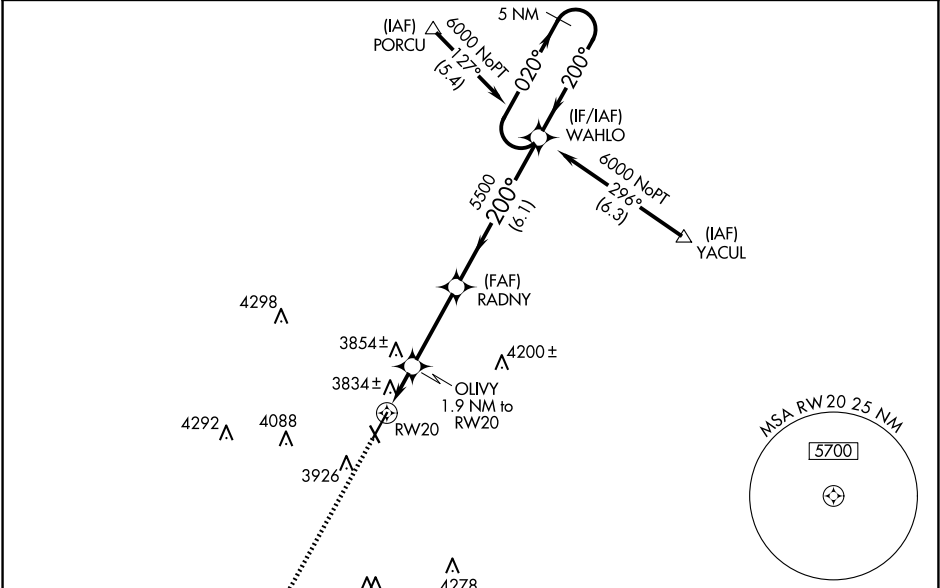

ELEV 3788

TDZE 3786

LEMGE

6000

200°

5 NM

6000

LEMGE

200°

5 NM

1.2 NM to RW20

1.9 NM to RW20

1.2 NM to RW20

1.9 NM to RW20

3.3 NM

6.1 NM

4420

5500

4420

5500

1.2 NM

0.7 NM

3.3 NM

6.1 NM

CATEGORY	A	B	C	D
LPV DA	3986-3/4 200 (200-3/4)			
LNAV/VNAV DA	4120-1 1/4 334 (400-1 1/4)			
LNAV MDA	4220-1	434 (500-1)	4220-1 1/4	434 (500-1 1/4)
CIRCLING	4280-1	492 (500-1)	4440-1 3/4 652 (700-1 3/4)	4620-2 3/4 832 (900-2 3/4)

5 NM Holding Pattern

020°

200°

6000

GP 3.00°

TCH 48

6100 X 100

3807 X 135

32

MIRL Rwy 2-20 0