


WAAS CH 82533 W21A	APP CRS 219°	Rwy Ldg 4000 TDZE 963 Apt Elev 963
--	------------------------	---

RNAV (GPS) RWY 21
WAYNE COUNTY (EKG)

T Baro-VNAV NA when using Somerset altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Somerset altimeter setting. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Somerset altimeter setting and increase all DA 44 feet, and all MDA 60 feet; increase LPV all Cnts visibility ½ mile and LNAV/VNAV all Cnts visibility ½ mile. Night landing: Rwy 3 NA.

MISSED APPROACH:
Climb to 4000 direct
UNNOG and hold.

AWOS-3PT 118.825	INDIANAPOLIS CENTER 124.625 371.925	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

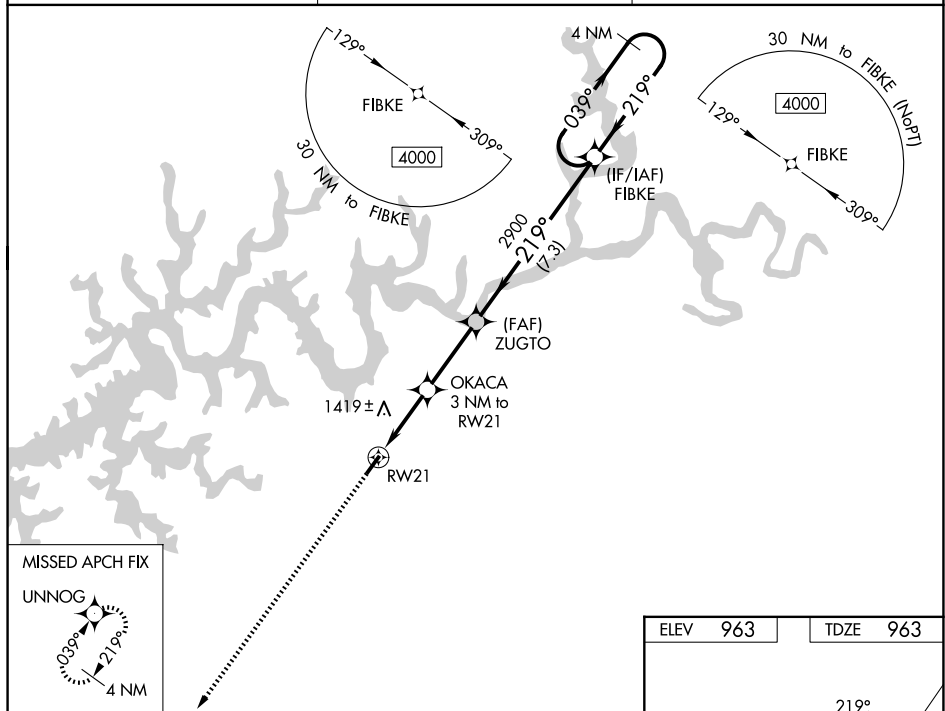

4000
UNNOG
*LNAV only.
OKACA 3 NM to RW21
ZUGTO 2900
FIBKE
4 NM Holding Pattern
RW21
*1.8 NM to RW21
1940*
219°
039°
219°
4000
GP 3.00°
TCH 40
1.8 NM 1.2 NM 3 NM 7.3 NM
CATEGORY A B C D
LPV DA 1257-1 294 (300-1) NA
LNAV/VNAV DA 1666-2½ 703 (800-2½) NA
LNAV MDA 1580-1 617 (700-1) NA
CIRCLING 1780-1¼ 817 (900-1¼) 1840-1¼ 877 (900-1¼) NA

