

APP CRS 204°	Rwy Ldg 3500 TDZE 1008 Apt Elev 1008
------------------------	---


RNAV (GPS) RWY 20

RNP APCH-GPS

NA Procedure NA at night. Rwy 20 helicopter visibility reduction below 1 SM NA. Use MWL altimeter setting; when not received, use LUD altimeter setting and increase all MDAs 80 feet and LNAV visibility Cat B/C $\frac{1}{4}$ SM, and Circling visibility Cat C $\frac{1}{2}$ SM.

MISSED APPROACH: Climb to 3500 direct ZOOOO and hold.

MWL ASOS 135.075	FORT WORTH CENTER 127.0 360.6	CTAF 122.9 0
---------------------------------------	--	-----------------------------------

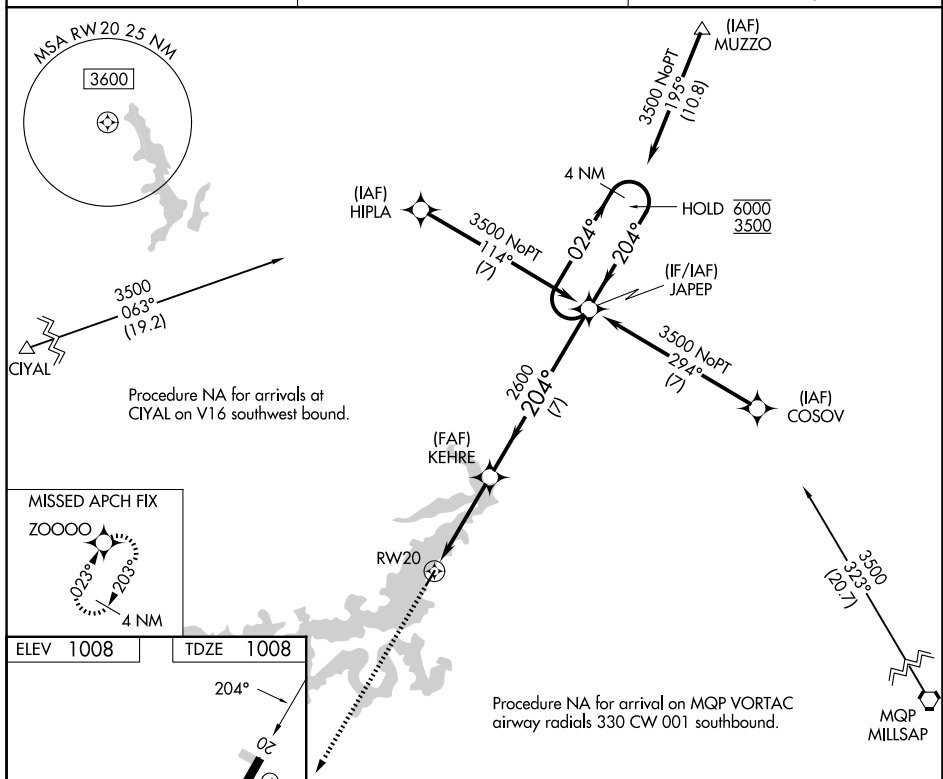

3500

ZOOOOO

VGSIs and descent angles not coincident
(VGSIs Angle 3.50/TCH 30).

4 NM
Holding Pattern

KEHRE

JAPEP

024° → 6000
← 204° 3500

RW20

3.77°
TCH 30

2600

3.9 NM

7 NM

CATEGORY	A	B	C	D
LNAV MDA	1680-1	672 (700-1)	1680-1 $\frac{7}{8}$ 672 (700-1 $\frac{7}{8}$)	NA
CIRCLING	1700-1 692 (700-1)	1860-1 $\frac{1}{4}$ 852 (900-1 $\frac{1}{4}$)	1880-2 $\frac{1}{2}$ 872 (900-2 $\frac{1}{2}$)	NA

MRL Rwy 2-20