


|                        |                                |             |
|------------------------|--------------------------------|-------------|
| APP CRS<br><b>160°</b> | Rwy Idg<br>TDZE<br><b>2377</b> | <b>6003</b> |
|                        | Apt Elev<br><b>2377</b>        |             |

**RNAV (GPS) RWY 16**  
OZONA MUNI (OZA)


**NA** GPS or RNP-0.3 required. DME/DME RNP-0.3 NA. Procedure NA at night.  
Obtain local altimeter on CTAF; when not received, use San Angelo altimeter setting.  
Rwy 16 helicopter visibility reduction below ¾ SM NA.

**MISSED APPROACH:** Climb to 5000 direct IXALE WP and hold.

|                            |                                       |                                 |
|----------------------------|---------------------------------------|---------------------------------|
| AWOS-3PT<br><b>118.425</b> | HOUSTON CENTER<br><b>125.75 346.4</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|----------------------------|---------------------------------------|---------------------------------|

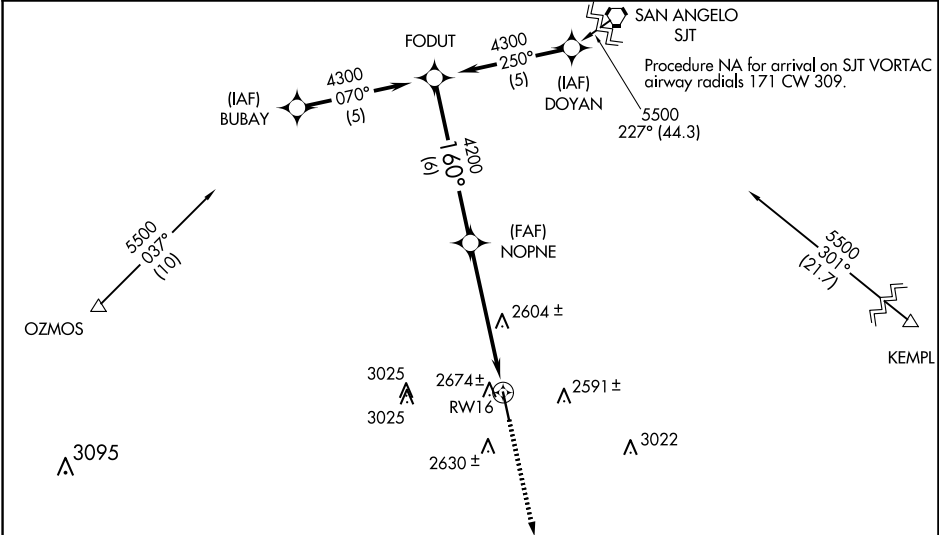

|                  |                  |
|------------------|------------------|
| ELEV <b>2377</b> | TDZE <b>2377</b> |
|------------------|------------------|

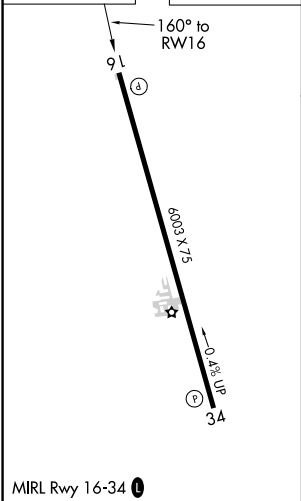

|                                       |                                               |                                                                     |                 |                         |       |
|---------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------------|-------------------------|-------|
| FODUT                                 |                                               | VGSI and RNAV glidepath not coincident<br>(VGSI Angle 3.00/TCH 39). |                 | 5000                    | IXALE |
| 4300                                  |                                               | 160°                                                                |                 | NOPNE                   |       |
| Procedure<br>Turn<br>NA               | *VDP NA with San Angelo<br>altimeter setting. |                                                                     | 4200            | *1.6 NM to<br>RW16      |       |
|                                       | 6 NM                                          |                                                                     | 3.05°<br>TCH 50 | RW16                    |       |
|                                       | 3.9 NM                                        |                                                                     | 1.6 NM          |                         |       |
| CATEGORY                              | A                                             |                                                                     | B               | C                       | D     |
| LNAV MDA                              | 2940-1¼ 563 (600-1¼)                          |                                                                     |                 | 2940-1½<br>563 (600-½)  | NA    |
| CIRCLING                              | 2980-1¼ 603 (700-1¼)                          |                                                                     |                 | 2980-1¾<br>603 (700-¾)  | NA    |
| SAN ANGELO ALTIMETER SETTING MINIMUMS |                                               |                                                                     |                 |                         |       |
| LNAV MDA                              | 3180-1¼ 803 (800-1¼)                          |                                                                     |                 | 3180-2¼<br>803 (800-2¼) | NA    |
| CIRCLING                              | 3220-1¼ 843 (900-1¼)                          |                                                                     |                 | 3220-2½<br>843 (900-2½) | NA    |