

|                                        |                        |                             |                                         |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS<br>CH <b>69238</b><br><b>W23A</b> | APP CRS<br><b>231°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>4003</b><br><b>964</b><br><b>964</b> |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|


RNAV (GPS) RWY 23  
SEARCY COUNTY (4A5)

**▽** DME/DME RNP-0.3 NA. Procedure NA at night. Circling NA SE of Rwy 5-23. Baro-VNAV NA.

**⚠ NA** Use Flippin altimeter setting; when not received, use Harrison altimeter setting and increase all Cats LPV DA to 1555 and visibility 1/8 mile, LNAV/VNAV all Cats DA to 2016, and all MDA 60 feet, LNAV Cat B/C and Circling Cat C visibility 1/4 mile. Helicopter visibility reduction below 1 SM NA.

**MISSED APPROACH:**  
Climb to 4000 direct  
MERLS and hold.

|                              |                                        |                        |
|------------------------------|----------------------------------------|------------------------|
| FLP AWOS-3<br><b>132.075</b> | MEMPHIS CENTER<br><b>126.85 281.55</b> | CTAF<br><b>122.9 0</b> |
|------------------------------|----------------------------------------|------------------------|

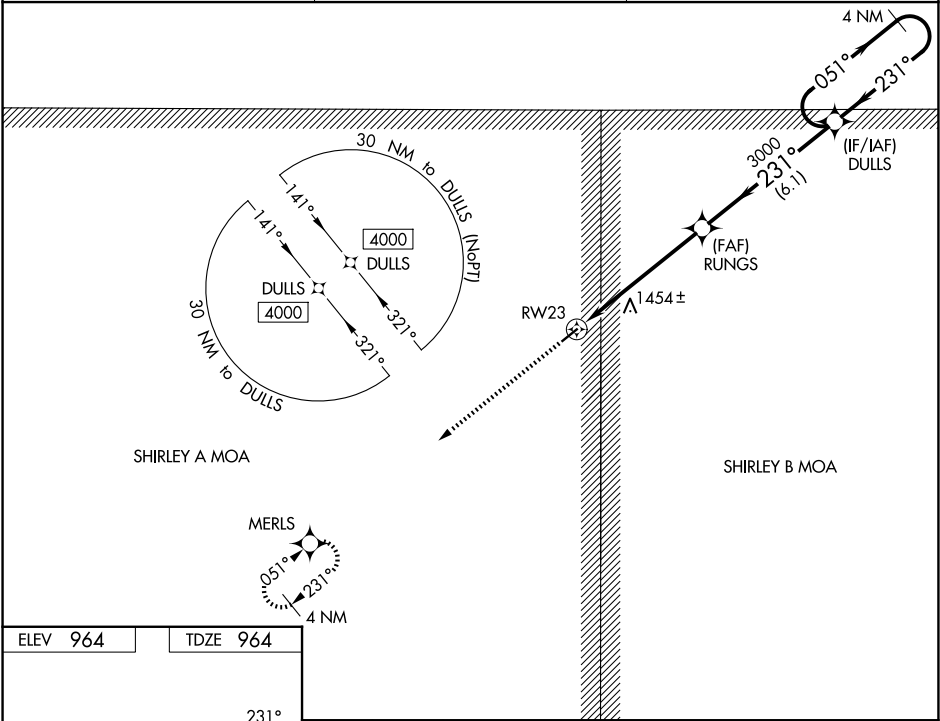

|              |                       |                               |                               |                      |
|--------------|-----------------------|-------------------------------|-------------------------------|----------------------|
| ELEV 964     | TDZE 964              | 4000                          | MERLS                         | 4 NM                 |
|              |                       |                               |                               |                      |
| RW23         |                       | RUNGS                         | DULS                          | 4 NM Holding Pattern |
| 3000         |                       | 3000                          | 4000                          | GP 3.25°<br>TCH 44   |
| 5.8 NM       |                       | 6.1 NM                        |                               |                      |
| CATEGORY     | A                     | B                             | C                             | D                    |
| LPV DA       | 1512-1 3/4            | 548 (600-1 3/4)               |                               | NA                   |
| LNAV/VNAV DA | 1973-4                | 1009 (1100-4)                 |                               | NA                   |
| LNAV MDA     | 1760-1<br>796 (800-1) | 1760-1 1/4<br>796 (800-1 1/4) | 1760-2 1/2<br>796 (800-2 1/2) | NA                   |
| CIRCLING     | 1760-1<br>796 (800-1) | 1760-1 1/4<br>796 (800-1 1/4) | 1760-2 1/2<br>796 (800-2 1/2) | NA                   |

SC-1, 09 JUL 2026 to 06 AUG 2026

SC-1, 09 JUL 2026 to 06 AUG 2026