

WAAS CH 65832 W18A	APP CRS 182°	Rwy Ldg TDZE 239 Apt Elev 239
--	------------------------	---

RNAV (GPS) RWY 18



DELTA RGNL (DRP)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using West Memphis altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use West Memphis altimeter setting: increase LPV DA to 507 feet and all visibilities 1⁄8 SM; increase LNAV/VNAV DA to 668 feet and all visibilities 1⁄4 SM; increase all MDAs 80 feet.

MISSED APPROACH: Climb to 3000 direct USUDY and hold, continue climb-in-hold to 3000.

AWOS-3P 120.0	MEMPHIS CENTER 135.3 335.8	UNICOM 123.0 (CTAF) 0
-------------------------	--------------------------------------	---------------------------------

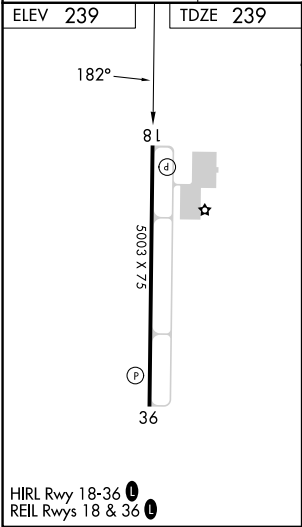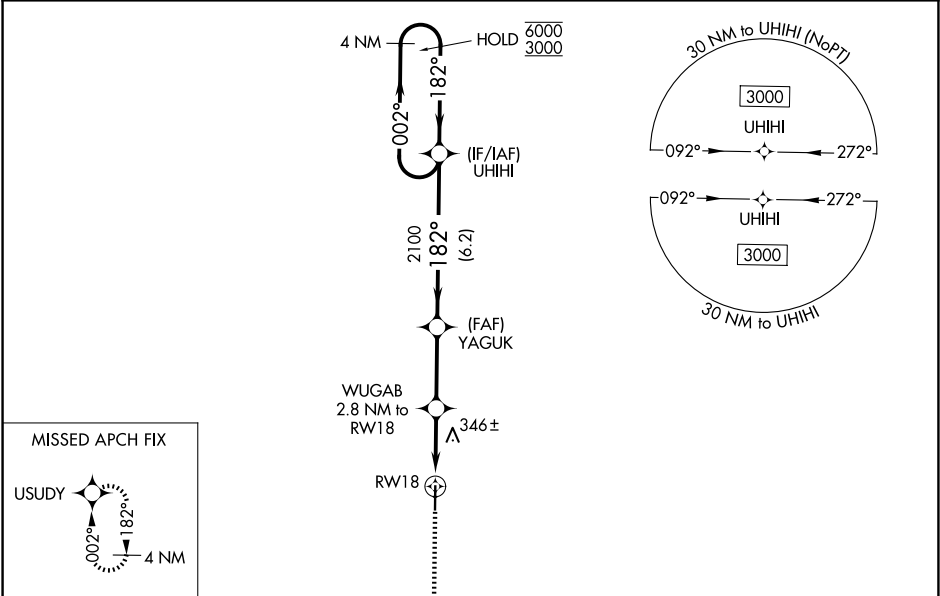

3000 USUDY		YAGUK 2100		UHIHI 4 NM Holding Pattern	
RW18		WUGAB 2.8 NM to RW18		GP 3.00° TCH 44	
1 NM		1.8 NM		6.2 NM	
CATEGORY	A	B	C	D	
LPV DA	439-3⁄4	200 (200-3⁄4)		NA	
LNAV/VNAV DA	600-1	361 (400-1)		NA	
LNAV MDA	600-1	361 (400-1)		NA	
CIRCLING	760-1	521 (600-1)		NA	

SC-1, 09 JUL 2026 to 06 AUG 2026

SC-1, 09 JUL 2026 to 06 AUG 2026