

RNAV (GPS) RWY 22


APCH CRS 217°	Rwy Idg THRE Arpt Elev	6630 17 33
------------------	------------------------------	------------------

- (USAF)


KEESLER AFB (KBIX)

RNP APCH V * When ALS inop, increase vis to 1 3/8 miles. ** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CD vis to 1 3/8 miles.		ALS-1 	MISSED APPROACH: Climb to 2200 direct CEDPO and track 175° to WAPGA. Expect ATC instructions.		
ATIS★ 281.55	GULFPORT APP CON/DEP CON★ 124.6 354.1 130° - 309° 127.5 254.25 310° - 129°	TOWER★ 120.75 269.075		GND CON★ 121.8 275.8	CLNC DEL 121.8 275.8


For uncompensated
Baro-VNAV systems,
LNAV/VNAV NA below
8°C or above 54°C.

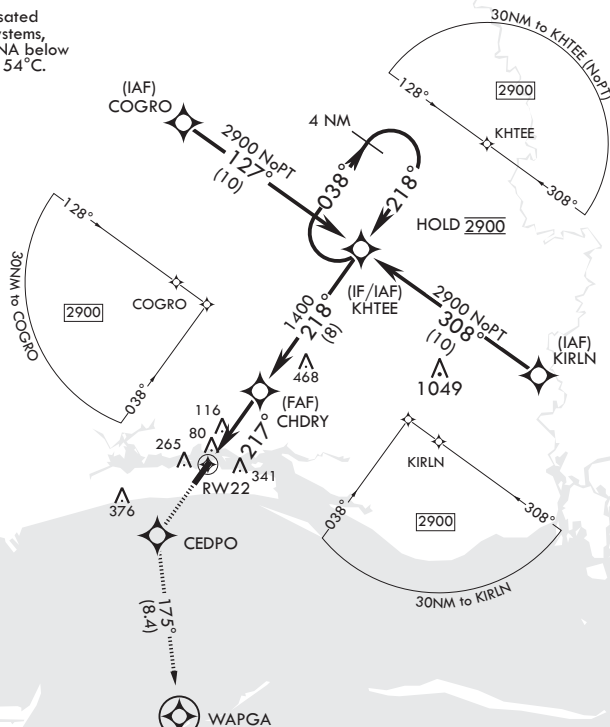

EMERG SAFE ALT 100 NM 3100  WAPGA

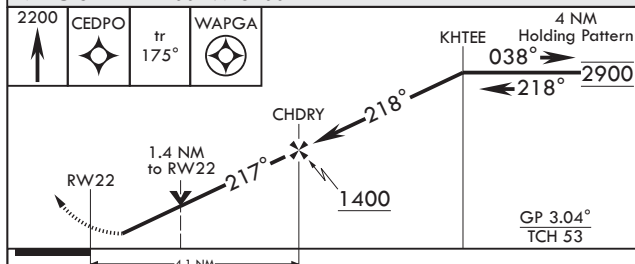

CATEGORY	A	B	C	D
LNNAV/VNAV DA*	520-1¼	503	(500-1¼)	
LNNAV MDA**	520/40	503 (500-¾)	520-1¼ 503	(500-1¼)
 CIRCLING	580-1 547 (600-1)	660-1 627 (700-1)	680-1¾ 647 (700-1¼)	680-2 647 (700-2)

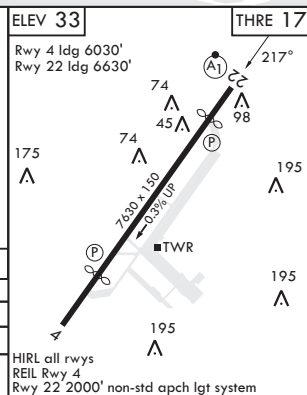

RNAV (GPS) RWY 22