


WAAS CH 81811 W32A	APP CRS 318°	Rwy Ldg TDZE Apt Elev	6121 713 727
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 32
BUFFALO NIAGARA INTL (BUF)

RNP APCH - GPS For uncompensated Baro-VNAV systems LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility all Cats to 1 SM. Inop table does not apply to LPV all Cats.		MALSR 	MISSED APPROACH: Climb to 3000 direct YULCU on track 235° to SUSKE and hold.
D-ATIS 135.35	BUFFALO APP CON 126.15 263.125	BUFFALO TOWER 120.5 257.8	GND CON 133.2 257.8

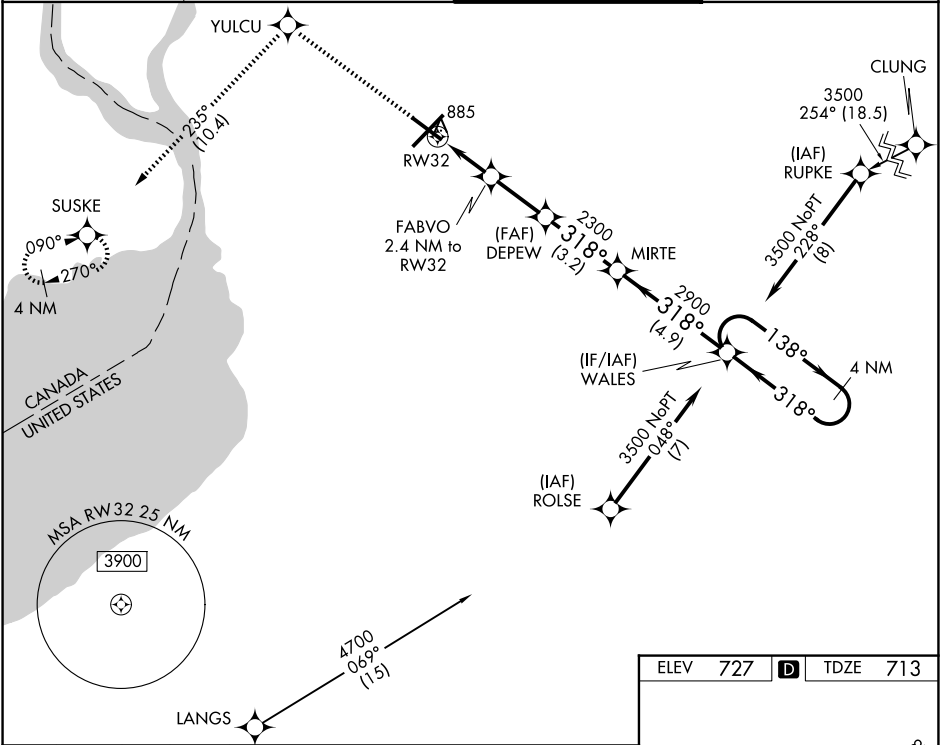

3000	YULCU	tr 235°	SUSKE	
* LNAV only.				
		FABVO 2.4 NM to RW32	DEPEW 2300	MIRTE 2900
		* 1.2 NM to RW32	* 1520	2300
		1.2 NM	1.2 NM	2.4 NM
			3.2 NM	4.9 NM
CATEGORY	A			
LPV DA	913-½ 200 (200-½)			
LNAV/ VNAV DA	1092-⅝ 379 (400-⅝)			
LNAV MDA	1140-½ 427 (500-½)		1140-¾ 427 (500-¾)	
CIRCLING	1200-1 473 (500-1)		1220-1½ 493 (500-1½)	
			1340-2 613 (700-2)	

