
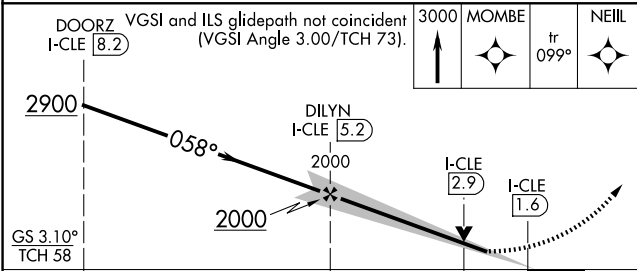



LOC/DME I-CLE	APP CRS	Rwy Ldg	6R	6L
111.9	058°	TDZE	8029	9000
Chan 56		Apt Elev	777	773
			800	800

ILS or LOC RWY 6R
CLEVELAND-HOPKINS INTL (CLE)

RNP APCH - GPS.		Rwy 6R MALSR	Rwy 6L ALSF-2	MISSED APPROACH: Climb to 3000 direct MOMBE and on track 099° to NEIL and hold.
⚠ Circling Rwy 10 NA at night. Simultaneous approach authorized. Simultaneous operations require use of vertical guidance; maintain last assigned altitude until established on glideslope. Inop table does not apply to Sidestep 6L. For inop ALS, increase S-LOC 6R Cats C/D visibility to 1½ SM.		AS	A	
D-ATIS 127.85	CLEVELAND APP CON 126.55 346.325	CLEVELAND TOWER 124.5 273.45		GND CON 121.7 273.45

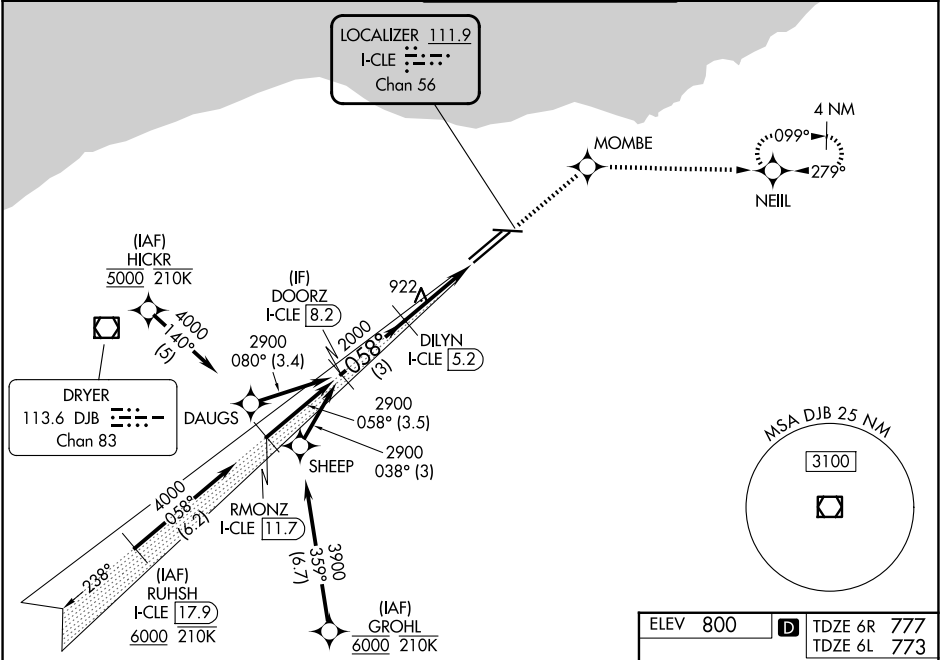

ELEV 800	TDZE 6R 777
	TDZE 6L 773



CATEGORY	A	B	C	D
S-ILS 6R	977/18		200 (200-1½)	
S-LOC 6R	1260/24	483 (500-1½)	1260/50	483 (500-1)
SIDESTEP 6L	1260-1½ 487 (500-1½)		1260-2 487 (500-2)	
CIRCLING	1420-1 620 (700-1)	1420-1¾ 620 (700-1¾)	1420-2 620 (700-2)	

