
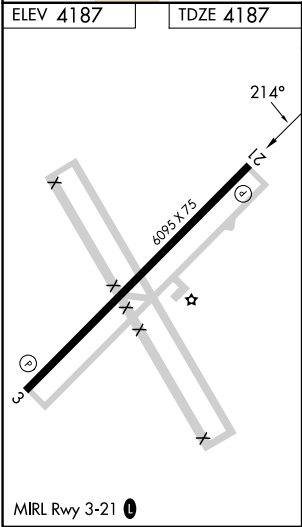


|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>77618</b><br><b>W21A</b> | APP CRS<br><b>214°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>6095</b><br><b>4187</b><br><b>4187</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|

RNAV (GPS) RWY 21  
COCHISE COUNTY (P33)

|                                                                                                                                                                                                                                                                                                                                                                                                   |                                            |                                                                                                                    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| RNP APCH - GPS.<br>⚠ Baro-VNAV NA when using Douglas Bisbee altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C or above 54°C. When local altimeter setting not received, use Douglas Bisbee altimeter setting and increase LPV DA to 4555 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 4555 feet and all visibilities ¼ SM; increase all MDAs 120 feet. |                                            | MISSED APPROACH: Climb to 4600 then climbing left turn to 8800 direct NOCHI and hold, continue climb-in-hold 8800. |
| AWOS-3PT<br><b>119.025</b>                                                                                                                                                                                                                                                                                                                                                                        | ALBUQUERQUE CENTER<br><b>134.45 327.15</b> | UNICOM<br><b>122.8 (CTAF) 0</b>                                                                                    |

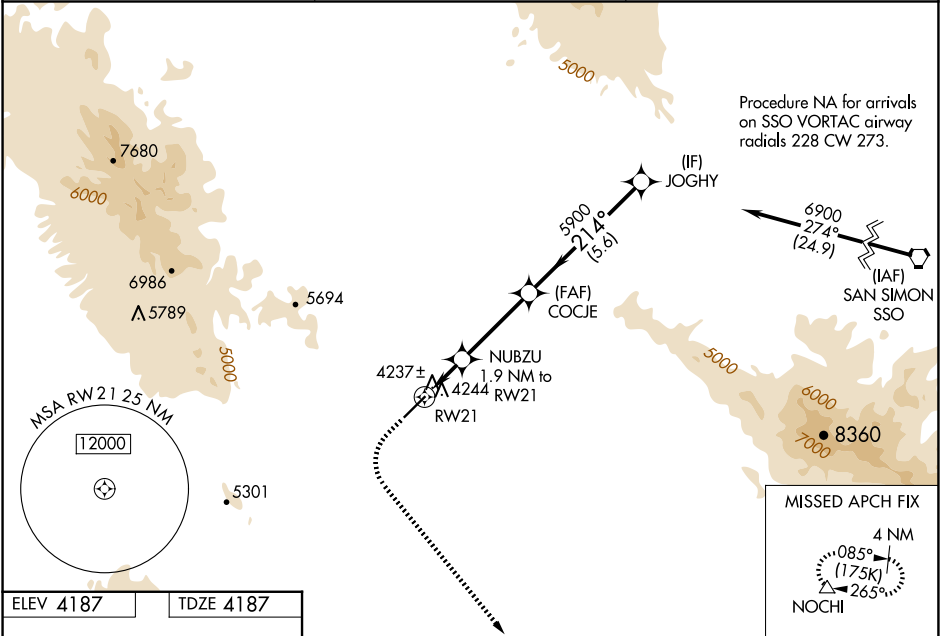

|                      |  |                        |  |
|----------------------|--|------------------------|--|
| ELEV 4187            |  | TDZE 4187              |  |
| 4600                 |  | 8800                   |  |
| NOCHI                |  | NOCHI                  |  |
| NUBZU 1.9 NM to RW21 |  | COCJE                  |  |
| 0.9 NM to RW21       |  | JOGHY                  |  |
| RW21                 |  | 6900                   |  |
| 4820                 |  | 5900                   |  |
| 0.9 NM               |  | 1 NM                   |  |
| 3.4 NM               |  | 5.6 NM                 |  |
| CATEGORY             |  | A                      |  |
| LPV DA               |  | 4437-7/8 250 (300-7/8) |  |
| LNAV/VNAV DA         |  | 4437-7/8 250 (300-7/8) |  |
| LNAV MDA             |  | 4520-1 333 (400-1)     |  |
| CIRCLING             |  | 4600-1 413 (500-1)     |  |
|                      |  | 4660-1 473 (500-1)     |  |
|                      |  | NA                     |  |

SW-4, 06 AUG 2026 to 03 SEP 2026

SW-4, 06 AUG 2026 to 03 SEP 2026