

RNAV (GPS) RWY 4

APCH CRS	Rwy Idg	5001
042°	TDZE	17
	Arpt Elev	18

[USN]

CORPUS CHRISTI NAS (TRUAX FLD) (KNGP)

RNP APCH - GPS

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (129°F)

MISSED APPROACH: Climb to 2000 direct FOLEM and hold.


ATIS★
127.9 290.9

APP CON
120.9 259.3

NAVY CORPUS TOWER★
134.85 340.2

GND CON	
118.7	257.85

ASR/PAR

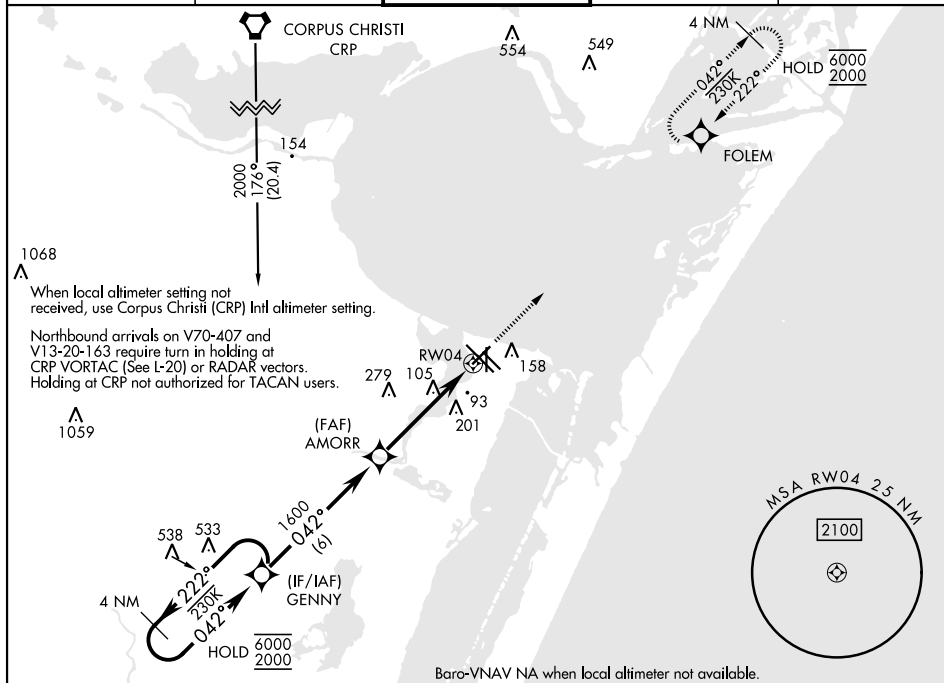


Baro-VNAV NA when local altimeter not available

EMERG SAFE ALT 100 NM 11,100

ELEV	18
------	----

TDZE	17
------	----



HIRL all rwys **L**
REIL Rwy 13L-31R **L**
REIL Rwy 4-22, 18-36, 31L

CORPUS CHRISTI, TEXAS

Amdt 2 30NOV23

The diagram illustrates the ILS for Corpus Christi (CRP). It shows a 4 NM Holding Pattern (GENNY) with altitudes of 6000 and 2000 feet. The approach path is marked with a 222° heading and a 042° heading. The approach path is labeled AMORR. The runway layout includes Runway 04 (RW04) and Runway 22 (RW22). The distance from the holding pattern to the runway is 4.8 NM. The diagram also shows the 1 NM to RW04 distance and the 1600 foot altitude at the runway threshold. The diagram is labeled VDP not authorized when using Corpus Christi (CRP) ILS altimeter setting.

CORPUS CHRISTI, TEXAS

27°42'N-97°17'W

CORPUS CHRISTI NAS (TRUAX FLD) (KNGP)

RNAV (GPS) RWY 4

SC-3, 06 AUG 2026 to 03 SEP 2026

SC-3, 06 AUG 2026 to 03 SEP 2026