

ILS or LOC RWY 23R

WRIGHT-PATTERSON AFB (KFFO)

LOC I-FFO 109.7	APCH CRS 233°	Rwy Idg 12,600 THRE 823 Arpt Elev 823
---------------------------	-------------------------	--

[USAF]

DME or RADAR required for Localizer.

- ▼ *When ALS inop, increase RVR to 40 and vis to ¾ mile.
**When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile,
CAT CDE vis to 1¾ miles.



† MISSED APPROACH: Climb via FFO R-233 to 2000, at 3 DME turn left direct CLACK to 3000 and hold.

ATIS 124.475 269.9	COLUMBUS APP CON 118.85 269.275	PATTERSON TOWER 127.8 281.45	GND CON 121.8 335.8
------------------------------	---	--	-------------------------------

*** When Rwy 23R VGSi inop, circling to Rwy 23R NA at night.

† Missed approach requires use of RNAV or ATC radar monitoring.

Autocoupled approach NA below 1458' MSL.

1290



PATTERSON
Chan 29 FFO

LOCALIZER 109.7
I-FFO

2049



1210



1299



1219



1096



1024



1467



1033



985



925



1096



1024



1033



985



925



1096



1024



1033



985



925



1096



(IF)

LOOMP

FFO [12]

053°

R-052

1540

FFO [12] Arc

3000

100°

265K

280°

(IAF)

CLACK

FFO [12]

6000

3000

1400

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

1335

MSA FFO 2.5 NM

3100

3100

3100

3100

3100

3100

3100

3100

3100

3100

3100

3100

3100

3100

3100

3100

3100


3100

3100


3100

3100

EMERG SAFE ALT 100 NM 3700

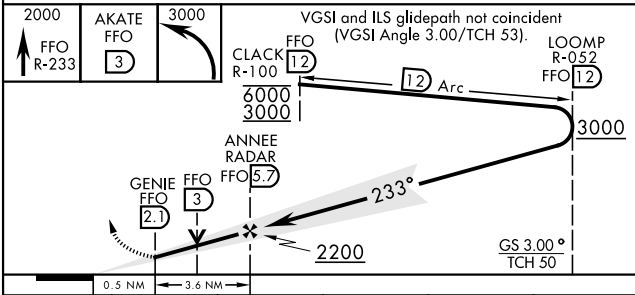

CATEGORY	A	B	C	D	E
S-ILS 23R*	1023/24		200	(200-½)	
S-LOC 23R**	1320/24	497 (500-½)	1320/50	497 (500-1)	
CIRCLING***	1380-1	1440-1	1560-2	1620-2½	1620-2¾
	557 (600-1)	617 (600-1)	737 (800-2)	797 (800-2½)	797 (800-2¾)

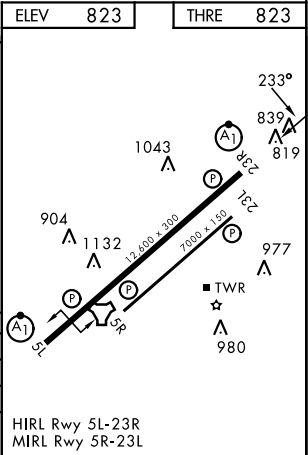

DAYTON, OHIO
Amdt 7 10AUG23

39° 50'N-84° 03'W

WRIGHT-PATTERSON AFB (KFFO)

ILS or LOC RWY 23R