


LOC/DME I-VGU	APP CRS	Rwy Ldg	9001
111.9	131°	TDZE	922
Chan 56		Apt Elev	958


ILS or LOC RWY 13
DES MOINES INTL (DSM)

▼ DME required. For inop ALS, increase S-LOC 13 Cats C/D visibility to RVR 4500. ▲ #RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR AS	MISSED APPROACH: Climb to 1600 then climbing right turn to 3000 direct DSM VORTAC then on DSM VORTAC R-254 to MIDDLE INT/DSM 12 DME and hold.
--	------------------------	--

ATIS 119.55	DES MOINES APP CON 123.9 307.15	DES MOINES TOWER 118.3 257.8	GND CON 121.9 348.6
----------------	------------------------------------	---------------------------------	------------------------

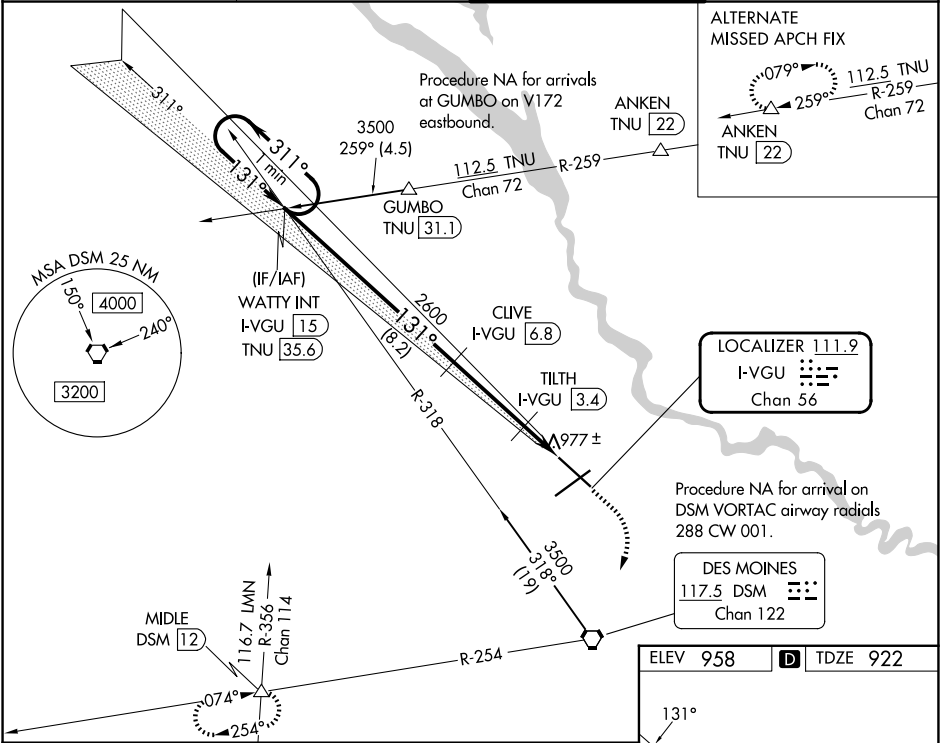

	WATTY INT I-VGU 15	CLIVE I-VGU 6.8	TILTH I-VGU 3.4	*LOC only	MIDDLE I-VGU 1.7
	3500	2600	1440	1420	1462
	8.2 NM	3.4 NM	0.9 NM	0.9 NM	
CATEGORY	A	B	C	D	
S-ILS 13#	1122/24	200 (200-½)			
S-LOC 13	1240/24	318 (300-½)			
CIRCLING	1420-1	462 (500-1)	1600-1¾ 642 (700-1¾)	1760-2½ 802 (900-2½)	

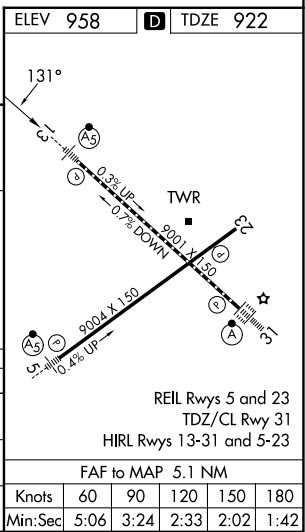

NC-3, 06 AUG 2026 to 03 SEP 2026

NC-3, 06 AUG 2026 to 03 SEP 2026