


APP CRS	Rwy Ldg	10001
216°	TDZE	632
	Apt Elev	645

RNAV (RNP) W RWY 21L

DETROIT METRO WAYNE COUNTY (DTW)

RNP AR APCH.	MALSR	MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct GAAGE and hold.
▼ For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations.		

D-ATIS 133.675	DETROIT APP CON 125.15 284.0	METRO TOWER 118.4 317.725	GND CON 121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)
-------------------	---------------------------------	------------------------------	---

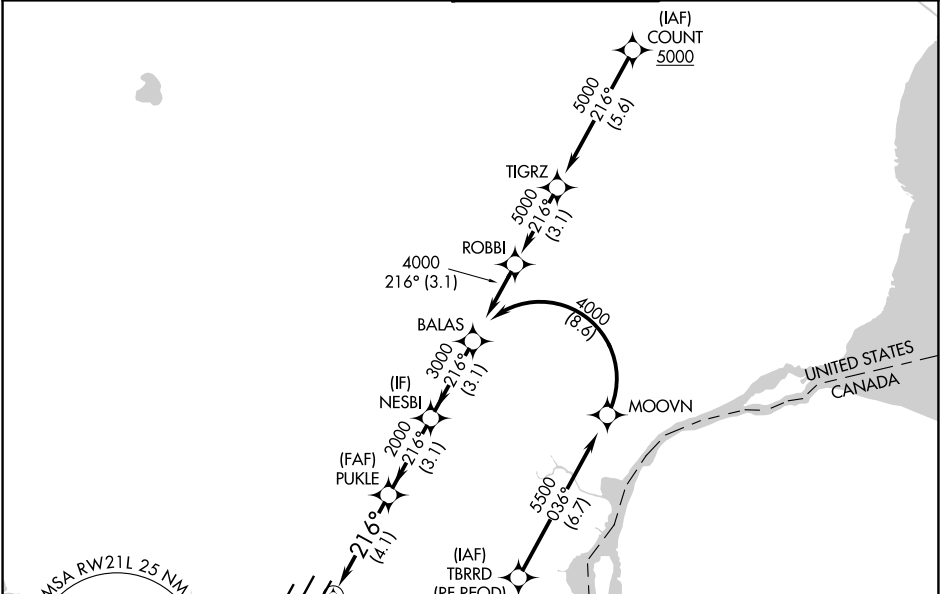

ELEV 645 **D** TDZE 632

MISSED APCH FIX

4 NM

GAAGE

1100 4000 GAAGE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 80).

BALAS 4000

GP 3.00° TCH 55

PUKLE 2000 NESBI 3000

RWY 21L

4.1 NM 3.1 NM 3.1 NM

CATEGORY	A	B	C	D
RNP 0.30 DA	1062/40 430 (500-¾)			

AUTHORIZATION REQUIRED

HIRL all Rwys
REIL Rwys 3L, 9L, 9R and 21R
TDZL/RCLS Rwys 3R, 4L, 4R and 22R

EC-1, 06 AUG 2026 to 03 SEP 2026

EC-1, 06 AUG 2026 to 03 SEP 2026