


APP CRS	Rwy Ldg	12003
216°	TDZE	637
	Apt Elev	645

RNAV (RNP) X RWY 22L
DETROIT METRO WAYNE COUNTY (DTW)

RNP AR APCH.		MALSR	MISSED APPROACH: Climb to 4000 direct HWLER and hold.
For uncompensated Baro-VNAV systems, procedure NA below -10°C (14°F) or above 54°C (130°F). Simultaneous approach authorized. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility to RVR 6000.			
D-ATIS	DETROIT APP CON	METRO TOWER	GND CON
133.675	124.05 284.0	128.125 317.725	121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)

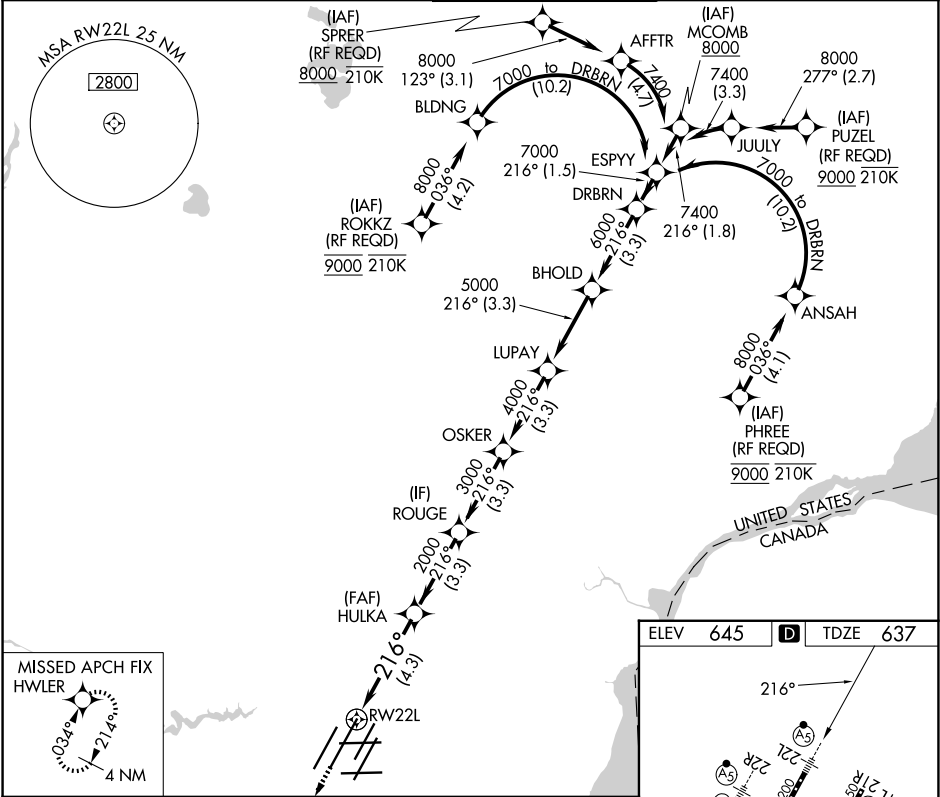

4000	HWLER	DRBRN
HULKA	ROUGE	OSKER
2000	3000	4000
5000	6000	7000
GP 2.85°	TCH 60	
4.3 NM	3.3 NM	3.3 NM
3.3 NM	3.3 NM	3.3 NM
3.3 NM	3.3 NM	3.3 NM
3.3 NM	3.3 NM	3.3 NM
3.3 NM	3.3 NM	3.3 NM
3.3 NM	3.3 NM	3.3 NM
CATEGORY	A	B
RNP 0.15 DA	941/24	304 (300-1/2)
RNP 0.30 DA	1040/40	403 (400-3/4)
AUTHORIZATION REQUIRED		

