

WAAS CH 99601 W22A	APP CRS 216°	Rwy Ldg 12003 TDZE 637 Apt Elev 645
--	------------------------	--

RNAV (GPS) Z RWY 22L
DETROIT METRO WAYNE COUNTY (DTW)




RNP APCH.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C (14°F) or above 54°C (130°F). Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cat C/D visibility to 1½ SM. #RVR 1800 authorized with use of FD or AP or HUD to DA.




MISSED APPROACH:
Climb to 4000 direct
HWLER and hold.


D-ATIS 133.675	DETROIT APP CON 124.05 284.0	METRO TOWER 128.125 317.725	GND CON 121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)
--------------------------	--	---------------------------------------	---

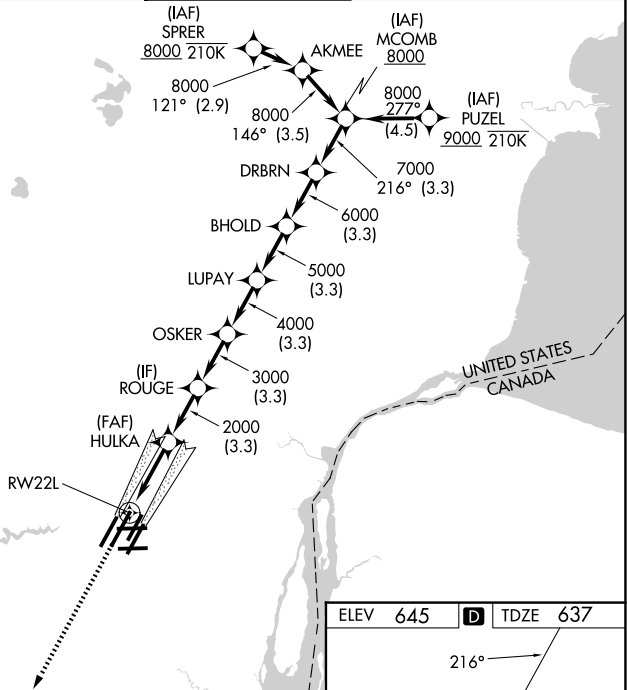

* LNAV only.

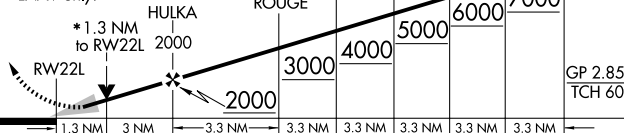

CATEGORY	A	B	C	D
LPV DA#	837/24		200 (200-½)	
LNAV/VNAV DA	938/24		301 (300-½)	
LNAV MDA	1100/24 463 (500-½)		1100/50 463 (500-¾)	
CIRCLING	1180-1 535 (600-1)		1180-1½ 535 (600-1½)	1240-2 595 (600-2)

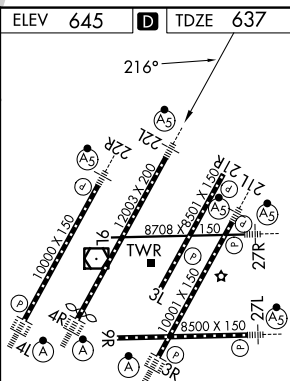

TDZL/RCLS Rwys 3R, 4L, 4R and 22R
REIL Rwys 3L, 9L, 9R and 21R
HIRL all Rwys