

APP CRS	Rwy Ldg	9025
085°	TDZE	3940
	Apt Elev	3962

RNAV (RNP) X RWY 8R

EL PASO INTL (ELP)



RNP AR APCH.
RF required.

ASR

For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C.


MISSED APPROACH: Climb to 4400 then climbing right turn to 7500 direct FABAN and hold.

D-ATIS 120.0 254.3	EL PASO APP CON 124.25 298.85	EL PASO TOWER 118.3 239.275	GND CON 121.9 348.6
-----------------------	----------------------------------	--------------------------------	------------------------

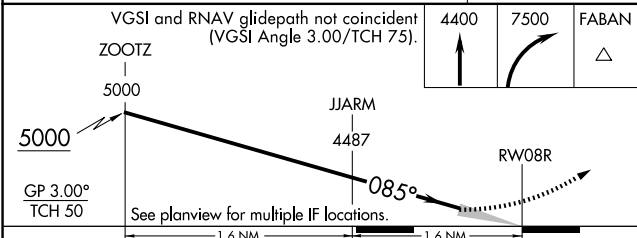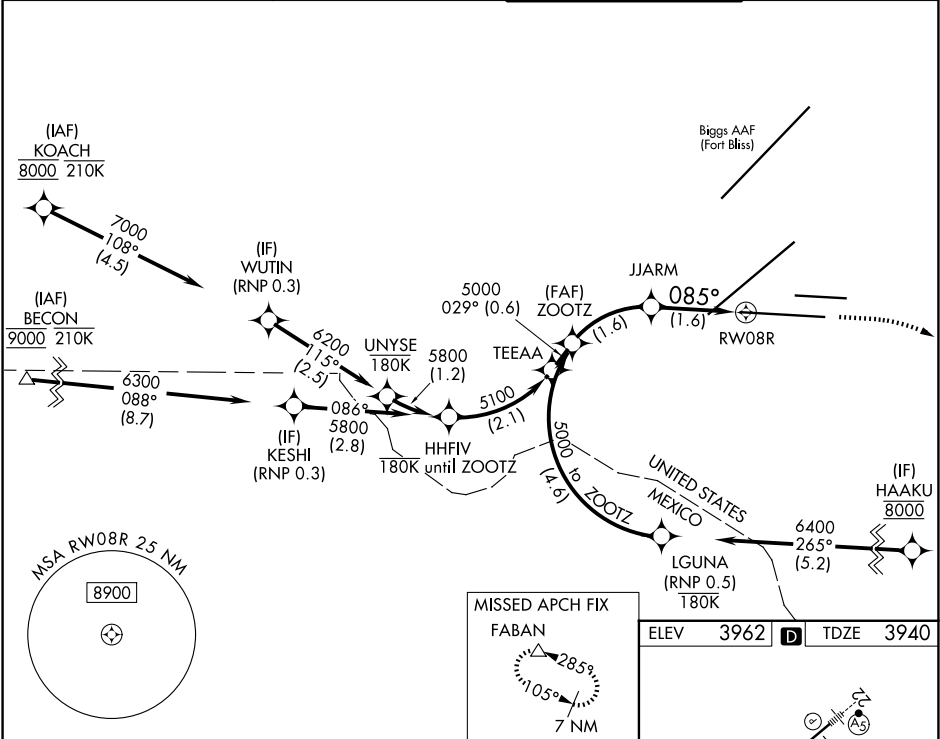

CATEGORY	A	B	C	D
RNP 0.20 DA		4193- ³ / ₄	253 (300- ³ / ₄)	
RNP 0.30 DA		4234- ⁷ / ₈	294 (300- ⁷ / ₈)	

AUTHORIZATION REQUIRED

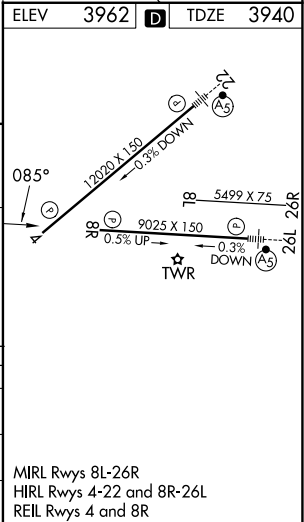

MIRL Rwy 8L-26R
HIRL Rwy 4-22 and 8R-26L
REIL Rwy 4 and 8R