

APP CRS 222°	Rwy Ldg 12020
	TDZE 3950
	Apt Elev 3962

RNAV (RNP) Z RWY 22
EL PASO INTL (ELP)

RNP AR APCH.

T For uncompensated Baro-VNAV systems, procedure NA below -8°C or above 54°C. For inop ALS, increase RNP 0.10 all Cats visibility to RVR 4000 and RNP 0.30 all Cats visibility to RVR 4500.

MALSR




MISSED APPROACH: Climb to 4400 then climbing left turn to 7500 direct FABAN and hold.

D-ATIS
120.0 254.3


EL PASO APP CON
124.25 298.85

EL PASO TOWER
118.3 239.275

GND CON
121.9 348.6

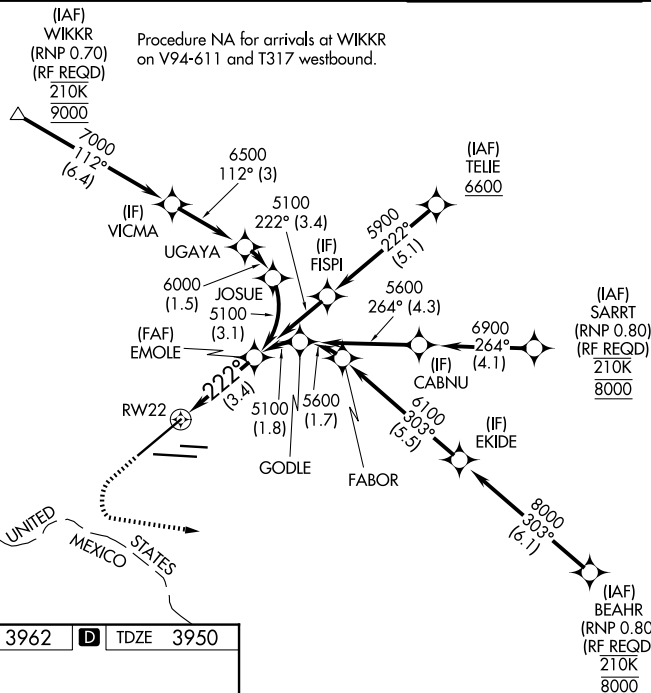

ELEV	3962	D	TDZE	3950
------	------	----------	------	------



MIRL Rwy 8L-26R
REIL Rwy 4 and 8R
HIRL Rwy 4-22 and 8R-26L

4400	7500	FABAN
		

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 70).

RW22

EMOLE

5100

GP 3.00°
TCH 55

See planview for multiple IF locations.

CATEGORY	A	B	C	D
RNP 0.10 DA		4200/24	250 (300-1/2)	
RNP 0.30 DA		4270/27	320 (400-5/6)	

AUTHORIZATION REQUIRED