

WAAS CH 40223 W26A	APP CRS 265°	Rwy Ldg TDZE Apt Elev	9025 3962 3962
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 26L
EL PASO INTL (ELP)

RNP APCH-GPS.

▼

⚠

ASR


Circling NA for Cat D west of Rwy 4-22. For inop ALS, increase LP and LNAV Cat A/B visibility to 1 SM, and Cat C/D to 1½ SM.

MALSR


AS

MISSED APPROACH: Climb to 4380 then climbing right turn to 7500 direct FABAN and hold.

D-ATIS 120.0 254.3	EL PASO APP CON 124.25 298.85	EL PASO TOWER 118.3 239.275	GND CON 121.9 348.6
------------------------------	---	---------------------------------------	-------------------------------

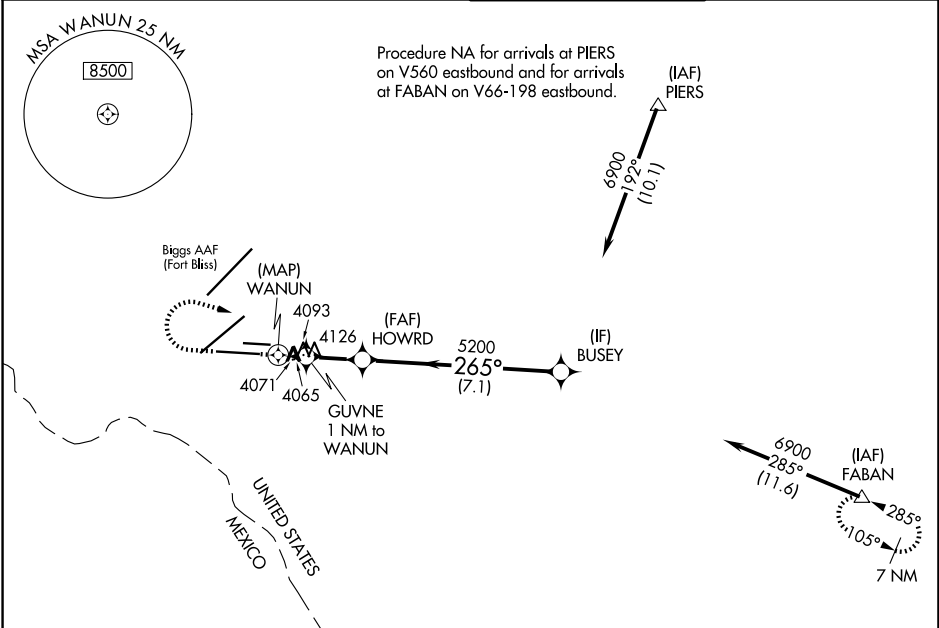

ELEV 3962	D	TDZE 3962
-----------	----------	-----------



MIRL Rwy 8L-26R REIL Rwy 4 and 8R HIRL Rwy 4-22 and 8R-26L
--

4380	7500	FABAN	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 75).			
CATEGORY	A		B		C	D
LP MDA	4380-¾ 418 (500-¾)					
LNAV MDA	4380-¾ 418 (500-¾)					
CIRCLING	4420-1 458 (500-1)	4440-1 478 (500-1)	4480-1½ 518 (600-1½)	4680-2¼ 718 (800-2¼)		