


ILS or LOC RWY 23

LOC I-POB <u>110.9</u>	APCH CRS 228°	Rwy Idg TDZE Arpt Elev 7501 200 225	[USAF]	POPE AAF (KPOB)
▼ * When ALS inop, increase RVR to 40 and vis to ¾ mile. ** When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile; CAT CD RVR to 60, vis to 1½ miles. *** Circling not authorized SE of Rwy 5-23. **** When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile; CAT CD vis to 1½ miles.			ALSF-1 	MISSED APPROACH: Climb to 700 then climbing right turn to 2000 direct AWGUS/POB 12 DME and hold. Missed approach requires use of RNAV or ATC radar monitoring.

ATIS	FAYETTEVILLE APP CON		TOWER	GND CON
132.3 353.725	125.175 285.575	(271° - 090°)	135.025 291.1	124.55 275.8
	133.0 290.25	(091° - 270°)		

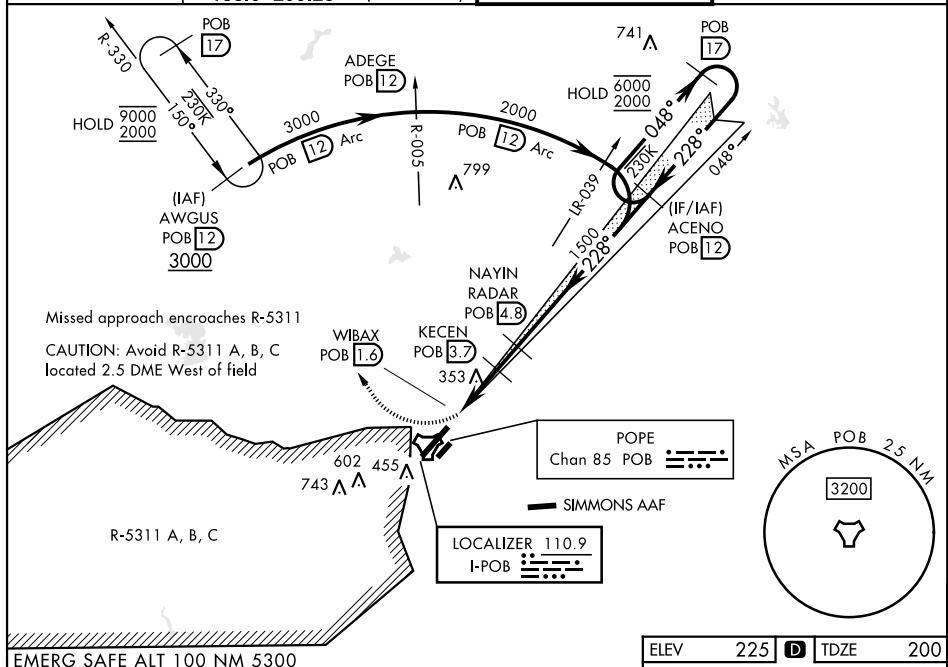

Category	A	B	C	D
S-LS 23 *	400/24	200	(200-½)	
S-LOC 23 **	620/24 420 (500-½)	620/40 420 (500-¾)		
CIRCLING ***	760-1 542 (600-1)	920-2 702 (800-2)	1060-2 842 (900-2¾)	

WITHOUT LAST STEPDOWN FIX

S-LOC 23 ****	720/24 520 (600-½)	720/55 520 (600-1)
---------------	--------------------	--------------------

FAF to MAP 3.2 NM

Knots	60	90	120	150	180
Min:Sec	3:12	2:08	1:36	1:17	1:00