ILS or LOC RWY 5

PAGE FLD (FMY)

LOC I-FMY	APP CRS	Rwy Ldg	5545
110.7	051°	TDZE	15
		Apt Elev	17

ADF or RADAR required for procedure entry. ADF required for LOC only. DME Required.

T A Rwy 5 helicopter visibility reduction below ¾ SM NA. When Circling to Rwy 31 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.

MISSED APPROACH: Climb to 1000 then climbing left turn to 2600 on RSW VORTAC R-354 to SERFS/RSW 16.4 DME and hold.

ATIS	FORT MYERS APP CON ★	PAGE TOWER ★	GND CON
123.725	125.15 306.2 (5, 13) 126.8 306.2 (23, 31)	119.0 (CTAF) L 306.95	121.7

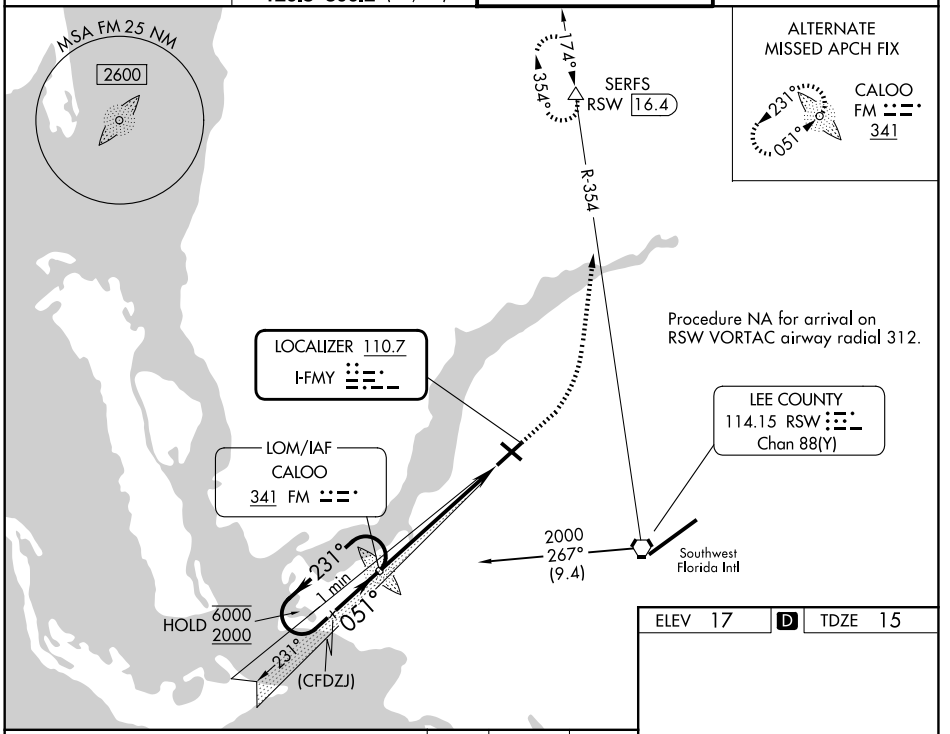

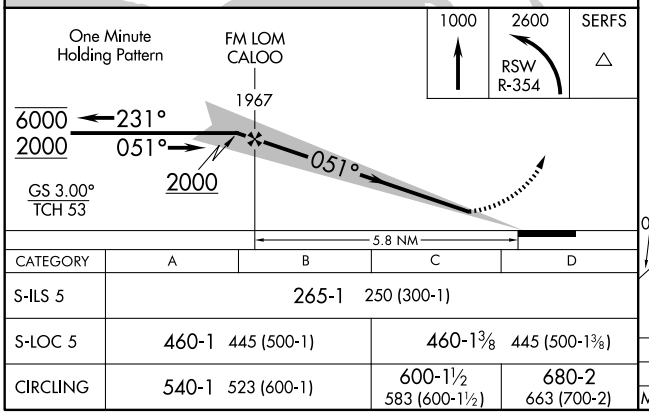

CATEGORY	A	B	C	D
S-ILS 5	265-1 250 (300-1)			
S-LOC 5	460-1 445 (500-1)		460-1⅜ 445 (500-1⅜)	
CIRCLING	540-1 523 (600-1)		600-1½ 583 (600-1½)	680-2 663 (700-2)

ELEV 17 D TDZE 15



REIL Rwys 5, 13, 23 and 31 L
MIRL Rwy 5-23 and 13-31 L

FAF to MAP 5.8 NM

Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56

SE-3, 06 AUG 2026 to 03 SEP 2026
SE-3, 06 AUG 2026 to 03 SEP 2026