WAAS CH 73024 W13A	APP CRS 133°	Rwy Ldg 4296 / TDZE 15 / Apt Elev 17

RNAV (GPS) RWY 13

PAGE FLD (FMY)

RNP APCH.

When Circling to Rwy 31 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH: Climb to 500 then climbing left turn to 2600 direct SERFS and hold.

ATIS	FORT MYERS APP CON ★	PAGE TOWER ★	GND CON
123.725	125.15 306.2 (5, 13) 126.8 306.2 (23, 31)	119.0 (CTAF) L 306.95	121.7

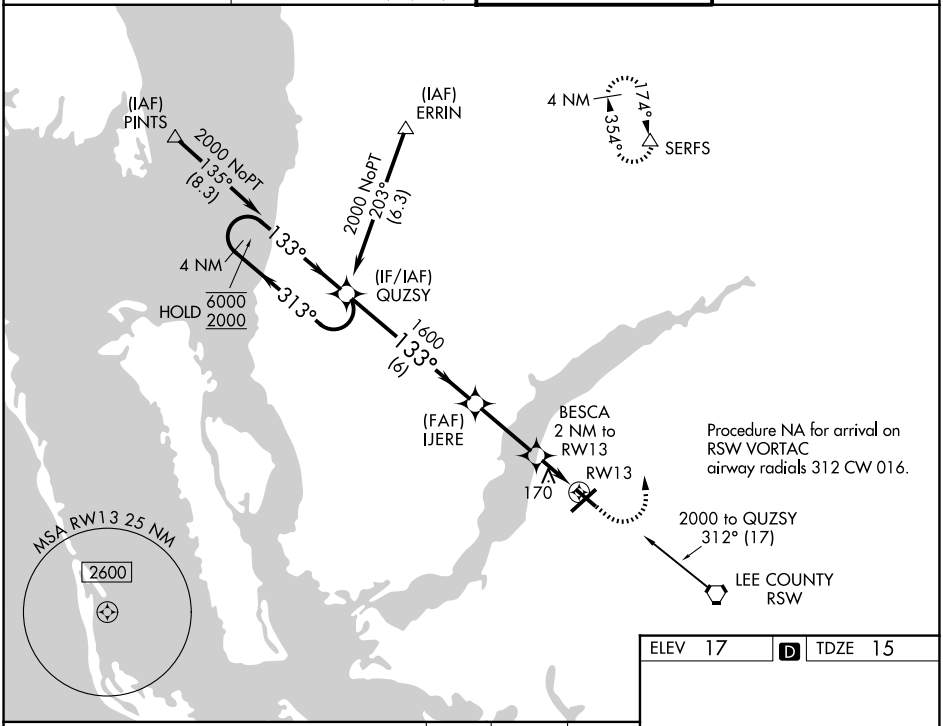

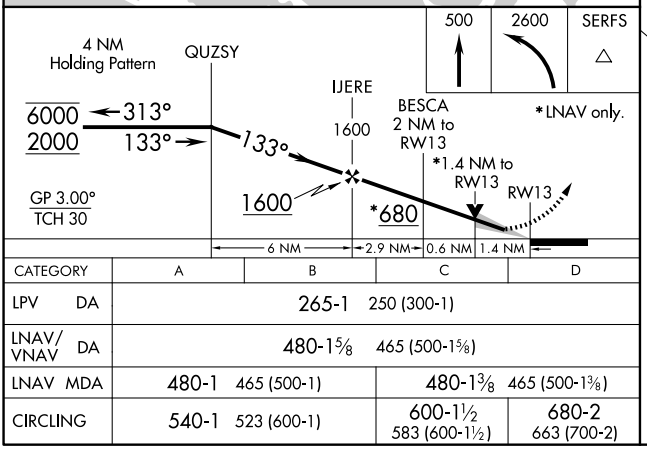

CATEGORY	A	B	C	D
LPV DA	265-1 250 (300-1)			
LNAV/VNAV DA	480-1⅝ 465 (500-1⅝)			
LNAV MDA	480-1 465 (500-1)		480-1⅜ 465 (500-1⅜)	
CIRCLING	540-1 523 (600-1)		600-1½ 583 (600-1½)	680-2 663 (700-2)

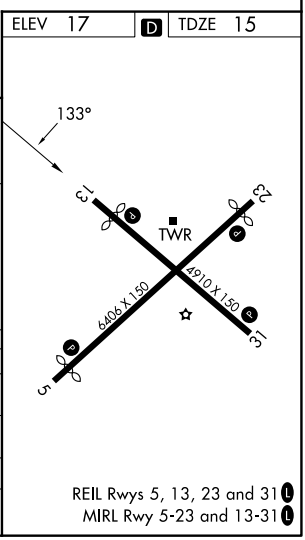

REIL Rwys 5, 13, 23 and 31 L
MIRL Rwy 5-23 and 13-31 L

SE-3, 06 AUG 2026 to 03 SEP 2026
SE-3, 06 AUG 2026 to 03 SEP 2026