

JACKSONVILLE, FLORIDA

RNAV (GPS) Z RWY 28

WAAS CH 46924 W28A	APCH CRS 276°	Rwy ldg TDZE 13 Arpt Elev 23
--	-------------------------	--

(USN)

JACKSONVILLE NAS (TOWERS FLD) (KNIP)


RNP APCH

▼ * When ALS inop, increase CAT BCD to 7/8 mile.
** When ALS inop, increase CAT AB vis to 1 mile, CAT CD vis to 1 1/8 miles.

SALSF MISSED APPROACH: Climb to 600 then climbing left turn to 2000 direct ITEGE, track 156° to MADEN and hold.

ATIS 124.35 290.425	APP CON/DEP CON 127.775 377.075	TOWER 125.15 (CTAF) 340.2	GND CON 128.6 336.4	CLNC DEL 134.775 0 353.675	ASR/PAR
-------------------------------	---	-------------------------------------	-------------------------------	--------------------------------------	---------

For uncompensated
BARO-VNAV systems,
Procedure NA below
-15°C (5°F) and
above 54°C (129°F).

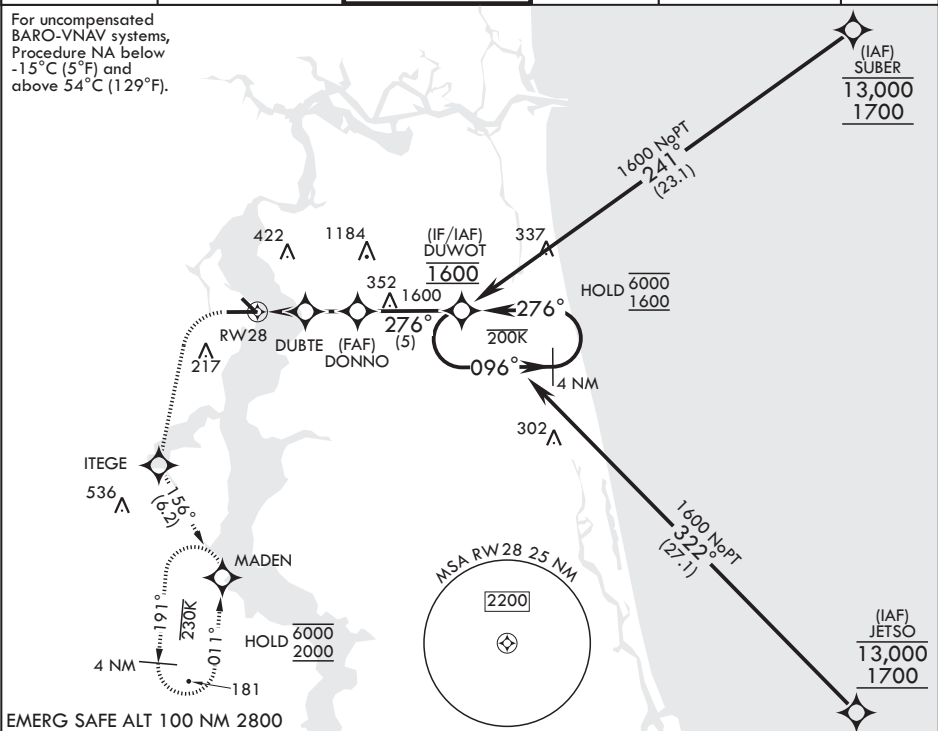

			ELEV 23	See Supp for declared dist.	TDZE 13
CATEGORY	A	B	C	D	
LPV DA	213-3/4	200	(200-3/4)		
LNAV/VNAV DA*	263-3/4 250 (300-3/4)	274-3/4 261 (300-3/4)	282-3/4 269 (300-3/4)	293-3/4 280 (300-3/4)	
LNAV MDA**	400-3/4 387	(400-3/4)	400-7/8 387	(400-7/8)	
CIRCLING	500-1 477	(500-1)	520-1 1/2 497 (500-1 1/2)	760-2 1/4 737 (800-2 1/4)	HIRL Rwy 10-28

JACKSONVILLE, FLORIDA

30°14'N - 81°41'W

JACKSONVILLE NAS (TOWERS FLD) (KNIP)

Amndt 2 30OCT25

RNAV (GPS) Z RWY 28

SE-3, 06 AUG 2026 to 03 SEP 2026

SE-3, 06 AUG 2026 to 03 SEP 2026