

WAAS
CH **93728**

APP CRS
090°

W09A

Rwy ldg **5198**

TDZE **428**

Apt Elev **430**

RNAV (GPS) RWY 9

LAWRENCEVILLE-VINCENNES INTL (LWV)


▼

▲

Baro-VNAV NA when using Mount Carmel altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 41°C (105°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Mount Carmel altimeter setting: increase LPV DA to 704 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 855 feet and all visibilities ½ SM; increase all MDAs 40 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat D ¼ SM. Circling to Rwy 36 NA at night.

MISSED APPROACH:
Climb to 2600 direct YONUB and hold.

ASOS 118.0	EVANSVILLE APP CON ★ 125.6 343.7	UNICOM 122.8 (CTAF) 0
----------------------	--	---------------------------------

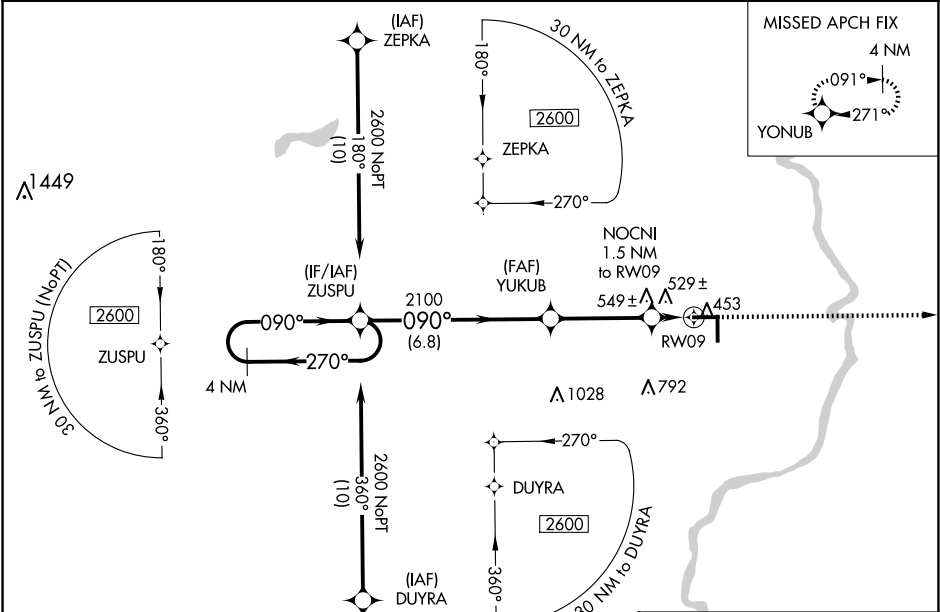

4 NM Holding Pattern

2600 ← 270°
090° →

GP 3.00°
TCH 45

ZUSPU

YUKUB 2100

NOCNI 1.5 NM to RW09

*LNAV only

*940

6.8 NM

3.6 NM

1.5 NM

RW09

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 26).

CATEGORY	A	B	C	D
LPV DA	678-¾ 250 (300-¾)			
LNAV/VNAV DA	829-1¾ 401 (400-1¾)			
LNAV MDA	820-1 392 (400-1)		820-1½ 392 (400-1½)	
CIRCLING	880-1 450 (500-1)	900-1 470 (500-1)	940-1½ 510 (600-1½)	1160-2¼ 730 (800-2¼)

ELEV 430

TDZE 428

090° to RW09

5198 X 100

81

5199 X 100

36

Ultralight Area

REIL Rwy 9, 27, 18 and 36

MIRL Rwy 9-27 and 18-36