

WAAS CH 42930 W14A	APP CRS 142°	Rwy Ldg TDZE 1199 Apt Elev 1219
--	------------------------	---

RNAV (GPS) RWY 14

LINCOLN (LNK)



▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Beatrice altimeter setting and increase all DA 91 feet and all MDA 100 feet, increase LPV all Cats and LNAV/VNAV all Cats visibility ½ mile, increase LNAV Cats C/D and Circling Cats C/D visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Beatrice altimeter setting.

MISSED APPROACH: Climb to 3100 direct OWSEW and hold.

ATIS 118.05 290.9	OMAHA APP CON 124.0 270.3	LINCOLN TOWER* 118.5(CTAF) 253.5	GND CON 121.9 275.8	UNICOM 122.95
-----------------------------	-------------------------------------	--	-------------------------------	-------------------------

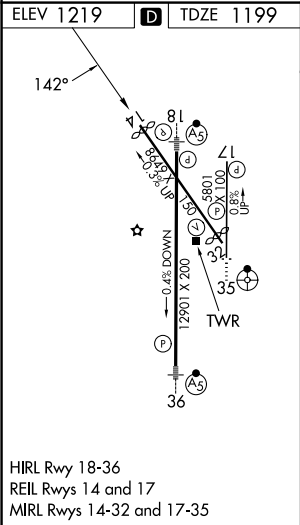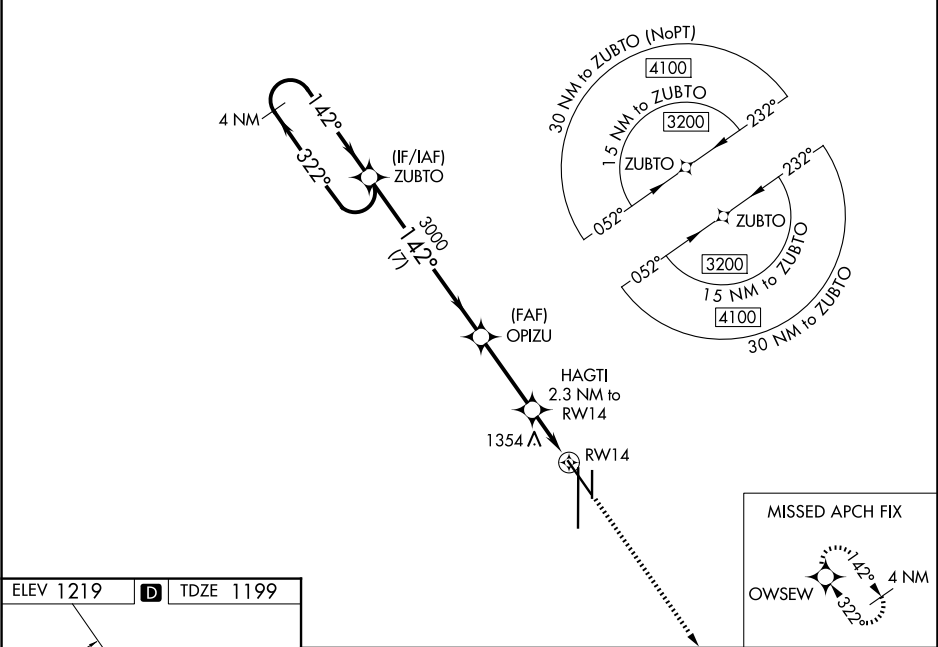

4 NM Holding Pattern ZUBTO OPIZU HAGTI 2.3 NM to RW14 3100 OWSEW					3200 ←322° 142°→ GP 3.00° TCH 48	3000 142° 3000 ↗ *1960 ↘ *LNAV only. RW14	7 NM 3.2 NM 1.1 NM 1.2 NM	
CATEGORY	A	B	C	D				
LPV DA	1449-1 250 (300-1)							
LNAV/VNAV DA	1449-1 250 (300-1)							
LNAV MDA	1620-1 421 (500-1)		1620-1¼ 421 (500-1¼)					
CIRCLING	1720-1 501 (600-1)	1760-1 541 (600-1)	1820-1¾ 601 (700-1¾)	1960-2½ 741 (800-2½)				