

WAAS CH 56421 W10A	APP CRS 102°	Rwy Ldg 4184 TDZE 430 Apt Elev 437
--	------------------------	---

RNAV (GPS) RWY 10

MACON DOWNTOWN (MAC)


▼

NA

Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Middle Georgia altimeter setting, when not received, use Robbins AFB altimeter setting and increase LPV DA to 726 feet, increase LNAV/VNAV DA to 833 feet and increase all MDA 20 feet.

MISSED APPROACH:
Climb to 3000 direct
JOBRA and hold.

MCN ASOS 120.775	ATLANTA APP CON ★ 124.2 279.6	UNICOM 123.0 (CTAF) 0
----------------------------	---	---------------------------------

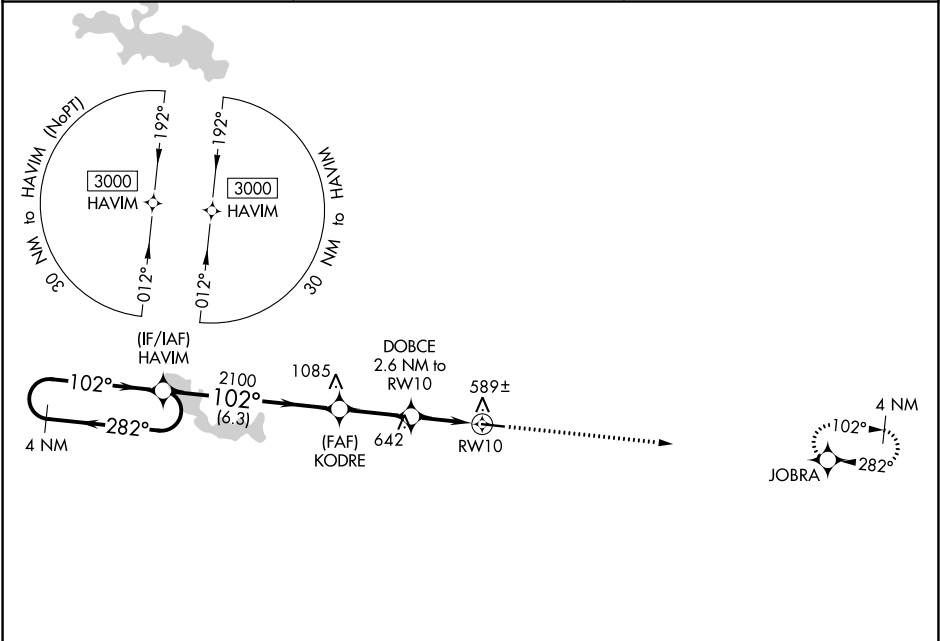

ELEV 437					D		TDZE 430		
4 NM Holding Pattern HAVIM 3000 ← 282° 102° → GP 3.00° TCH 40 VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 23). KODRE 2100 DOBCE 2.6 NM to RW10 RW10 *1280 *LNAV only. 508 4694 X 100 28 102°									
CATEGORY	A		B		C		D		
LPV DA	712-1				282 (300-1)				
LNAV/VNAV DA	819-1 ³ / ₈				389 (400-1 ³ / ₈)				
LNAV MDA	880-1		450 (500-1)		880-1 ³ / ₈		450 (500-1 ³ / ₈)		
CIRCLING	1200-1		763 (800-1)		1320-2 ³ / ₄ 883 (900-2 ³ / ₄)		1480-3 1043 (1100-3)		
MIRL Rwy 10-28 0									