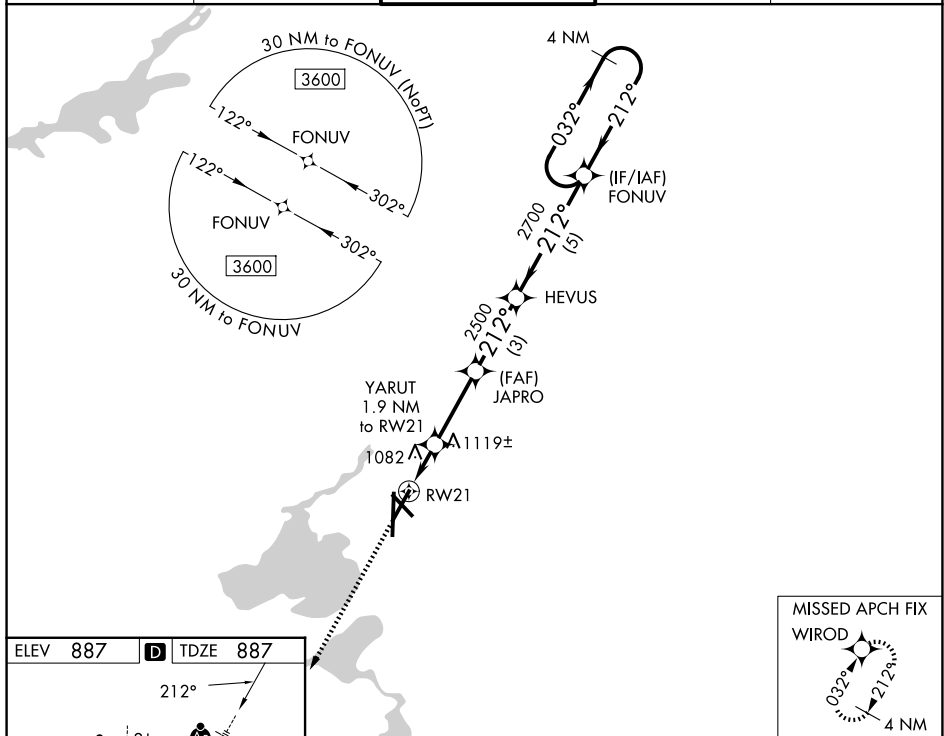


WAAS CH 42829 W21A	APP CRS 212°	Rwy Ldg 7015 TDZE 887 Apt Elev 887
--	------------------------	---

RNAV (GPS) RWY 21
DANE COUNTY RGNL/TRUAX FLD (MSN)

	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALSR, increase LNAV/VNAV all Cats visibility to 3$\frac{1}{4}$ mile and LNAV Cat C/D visibility to 1$\frac{3}{4}$ mile.	MALSR 	MISSED APPROACH: Climb to 3600 direct WIROD and hold.
---	--	---	---

ATIS 124.65 278.3	MADISON APP CON★ 135.45 343.7	MADISON TOWER★ 119.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
----------------------	----------------------------------	--	------------------------	------------------

[illegible]