

LOC I-EXW	APP CRS	Rwy Ldg
108.3	259°	7815
		TDZE
		548
		Apt Elev
		565

ILS or LOC RWY 26

EASTERN WV RGNL/SHEPHERD FLD (MRB)

▼

▲NA


For inop ALS, increase S-ILS 26 Cat E visibility to ¾ SM and S-LOC 26 Cat E visibility to 1¼ SM.

MALSR

MISSED APPROACH:

Climb to 1100 then climbing left turn to 3300 direct MRB VORTAC and hold, continue climb-in-hold to 3300.

ASOS	POTOMAC APP CON	MARTINSBURG TOWER★	GND CON	UNICOM
119.925	126.825 239.025	124.3 (CTAF) 0 233.7	121.8 257.65	122.95

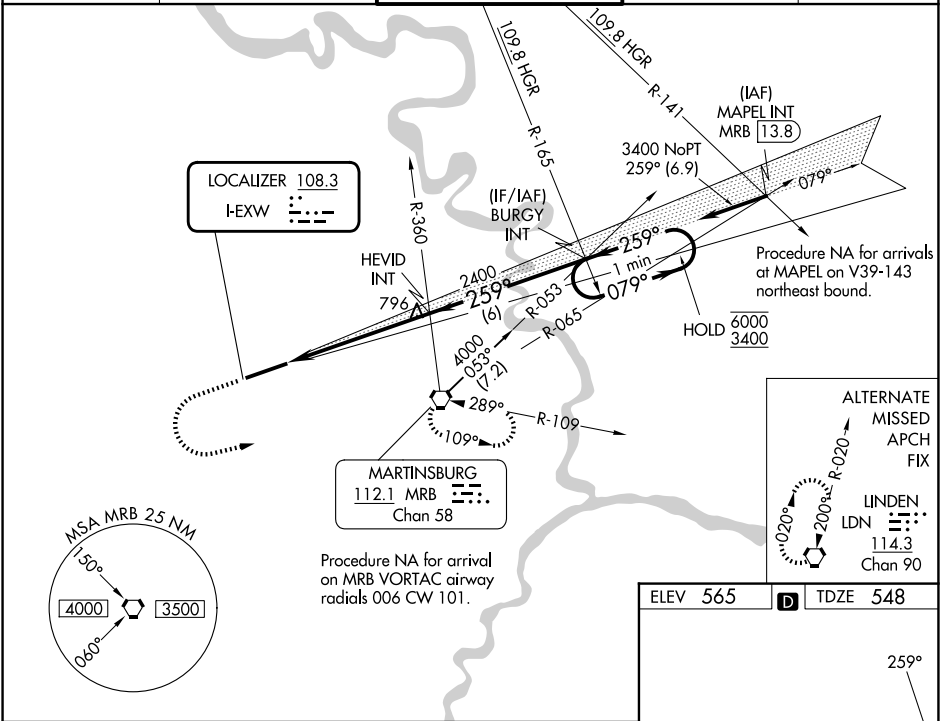

1100

3300

MRB

HEVID INT

BURGY INT

One Minute Holding Pattern

2400

259°

079°

6000

3400

GS 3.00°

TCH 52

5.7 NM

6 NM

CATEGORY	A	B	C	D	E
S-ILS 26	748-½ 200 (200-½)				
S-LOC 26	980-½ 432 (500-½)		980-¾ 432 (500-¾)		
CIRCLING	1100-1 535 (600-1)	1240-1 675 (700-1)	1240-2 675 (700-2)	1320-2½ 755 (800-2½)	2180-3 1615 (1700-3)

TWR

8815 X 150

259°

REIL Rwy 8

HIRL Rwy 8-26

FAF to MAP 5.7 NM

Knots	60	90	120	150	180
Min:Sed	5:42	3:48	2:51	2:17	1:54