

WAAS CH 77924 W22A	APP CRS 223°	Rwy Ldg TDZE 2630 Apt Elev 2634
--	------------------------	---

RNAV (GPS) RWY 22

FRANK WILEY FLD (MLS)

RNP APCH-GPS.


▼

⚠

Baro-VNAV and VDP NA when using Glendive altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 54°C. When local altimeter setting not received, use Glendive altimeter setting: increase LPV and LNAV/VNAV DA to 3047 and all visibilities ½ SM. Increase all MDA 180 feet and LNAV Cat C and D visibilities ½ SM and Circling Cat C and D visibilities ½ SM.

MISSED APPROACH: Climb to 6000 direct OPEJY and hold, continue climb-in-hold to 6000.

ASOS 135.575	SALT LAKE CENTER 126.85 305.2	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------------

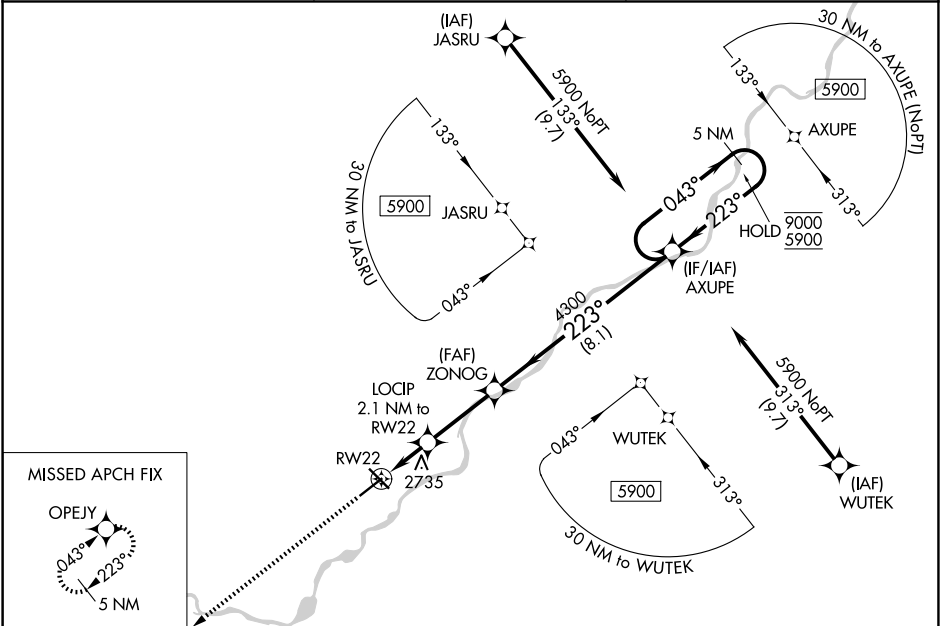

ELEV 2634

D

TDZE 2630

6000

OPEJY

LOCIP

2.1 NM to RW22

ZONOG

4300

AXUPE

5 NM Holding Pattern

RW22

1.1 NM to RW22

3320

4300

GP 3.00°

TCH 41

CATEGORY	A	B	C	D
LPV DA	2880-1	250 (300-1)		
LNAV/VNAV DA	2880-1	250 (300-1)		
LNAV MDA	3000-1	370 (400-1)		
CIRCLING	3060-1 426 (500-1)	3100-1 466 (500-1)	3160-1½ 526 (600-1½)	3320-2¼ 686 (700-2¼)

MIRM Rwy 4-22 and 13-31

REIL Rwy 4, 13, 22 and 31