# RNAV (GPS) RWY 33

MOBILE RGNL (MOB)

| WAAS CH 69306 W33A | APP CRS 327° | Rwy Ldg 8502 / TDZE 219 / Apt Elev 219 |
|---|---|---|

RNP APCH - GPS.

ASR — For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500. * RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 700 then climbing left turn to 2000 direct SQWID and hold.

| ATIS | MOBILE APP CON ★ | MOBILE TOWER ★ | GND CON | UNICOM |
|---|---|---|---|---|
| 124.75 257.85 | 118.5 269.3 | 118.3 (CTAF) L 239.0 | 121.9 348.6 | 122.95 |

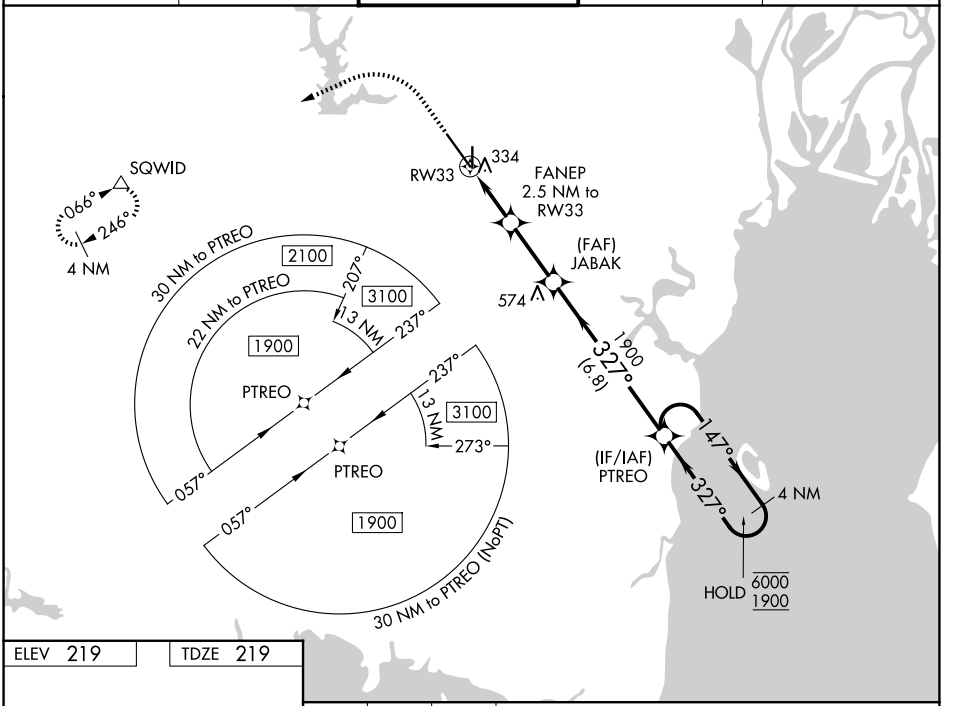


ELEV 219 TDZE 219

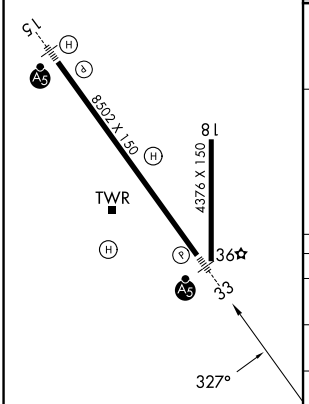


MIRL Rwy 18-36
HIRL Rwy 15-33

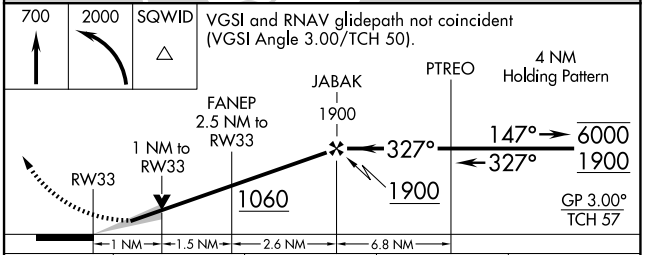


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA * | 419/24 200 (200-½) | | | |
| LNAV/VNAV DA | 505/24 286 (300-½) | | | |
| LNAV MDA | 600/24 381 (400-½) | | 600/35 381 (400-⅝) | |
| CIRCLING | 680-1 461 (500-1) | | 740-1½ 521 (600-1½) | 780-2 561 (600-2) |



SE-4, 06 AUG 2026 to 03 SEP 2026
SE-4, 06 AUG 2026 to 03 SEP 2026