


WAAS CH 40313 W01B	APP CRS 006°	Rwy Ldg TDZE 17 Apt Elev 36
--	------------------------	---

RNAV (GPS) Z RWY 1L

NAPA COUNTY (APC)


RNP APCH - GPS. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. Inop table does not apply to LPV minimums. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM.	MALS 24	MISSED APPROACH: Climb to 5000 direct CIVDA and on track 326° to POPES and hold. Missed approach requires minimum climb of 420 feet per NM to 2200; if unable to meet climb gradient, see RNAV (GPS) Y RWY 1L.
--	---	--

ATIS 124.05	OAKLAND CENTER 127.8 353.5	NAPA TOWER★ 118.70 (CTAF) 257.8	GND CON 121.7	UNICOM 122.95
-----------------------	--------------------------------------	---	-------------------------	-------------------------

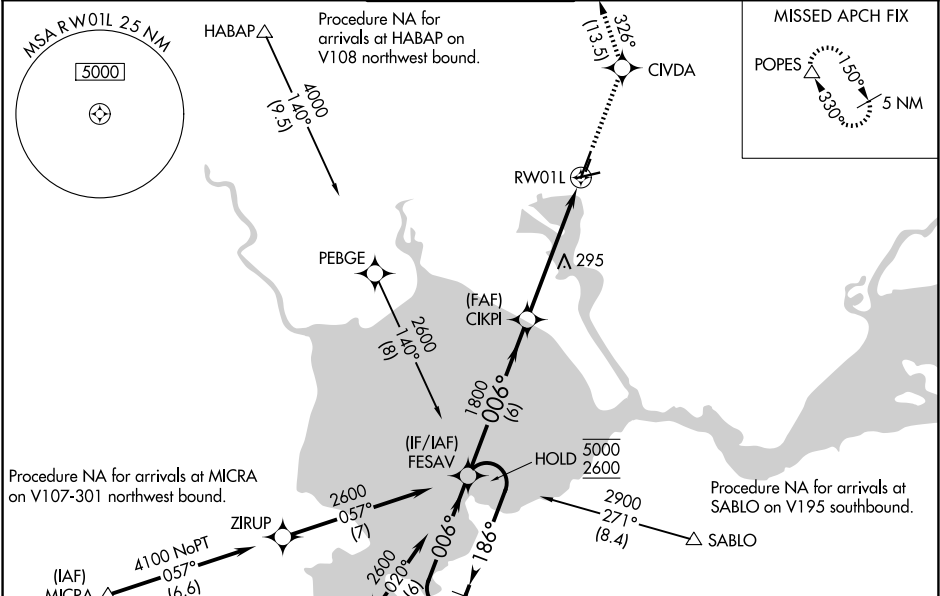

ELEV 36	TDZE 17
REIL Rwy 6 1	
MIRL Rws 6-24 and 1L-19R 1	

4 NM Holding Pattern		FESAV	5000 CIVDA	tr 326°	POPES

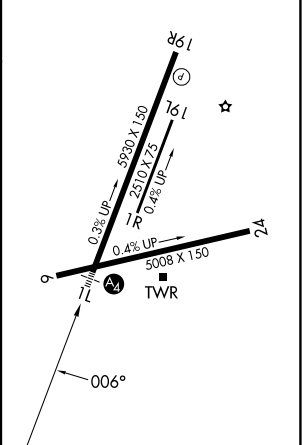

SW-2, 06 AUG 2026 to 03 SEP 2026

SW-2, 06 AUG 2026 to 03 SEP 2026