




APP CRS	Rwy Ldg	7601
021°	TDZE	587
	Apt Elev	599

RNAV (RNP) Z RWY 2C

NASHVILLE INTL (BNA)

RNP APCH - GPS. Authorization required. From SITEE, JOVEE, LNWOD, RMSEY or MIGAN: RF.	MALSR 	MISSED APPROACH: Climb to 1300 then climbing left turn to 4000 direct TANDS and hold.
▼ For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 4500, increase RNP 0.30 all Cats visibility to 1 3/4 SM.		

D-ATIS 135.1	NASHVILLE APP CON 118.4 360.7 (030°-196°) 119.35 372.0 (197°-029°)	NASHVILLE TOWER 118.6 257.8	GND CON 121.9 348.6
-----------------	--	--------------------------------	------------------------

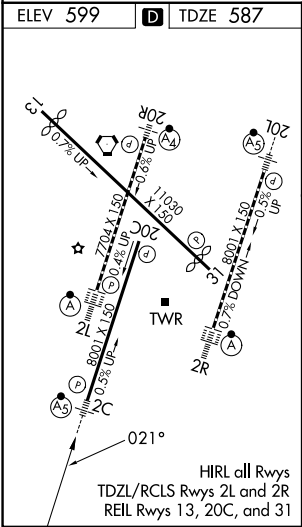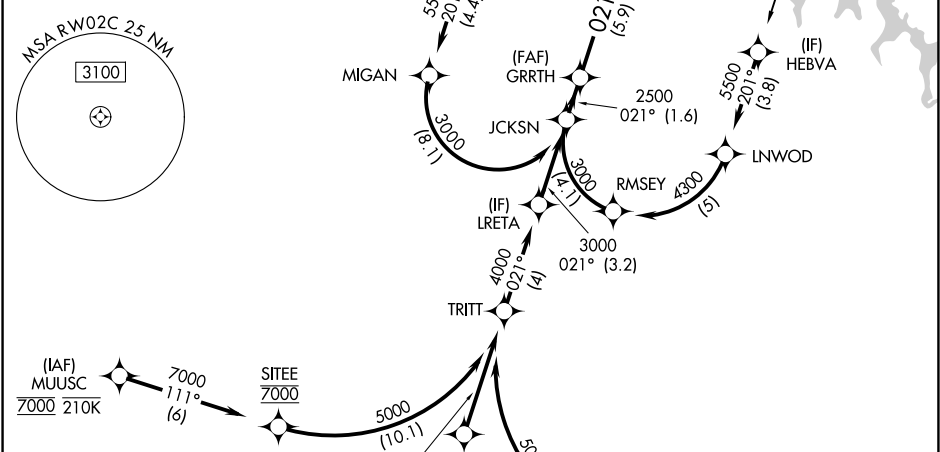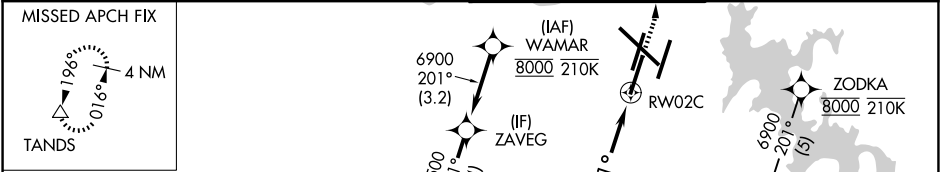

See planview for multiple IF locations.

	JCKSN	GRRTH		
	3000	2500		
	2500			
	GP 3.00°			
	TCH 60			
	1.6 NM	5.9 NM		
CATEGORY	A	B	C	D
RNP 0.15 DA		852/24	265 (300-1/2)	
RNP 0.30 DA		1018/50	431 (500-1)	

AUTHORIZATION REQUIRED