

APP CRS
021°

Rwly Ldg **8000**
TDZE **590**
Apt Elev **599**

RNAV (RNP) Z RWY 2R

NASHVILLE INTL (BNA)

RNP AR APCH - GPS. Authorization required. From WAMAR, ZODKA, MUUSC, or AMAND: RF

ALSf-2

⚠

For uncompensated Baro-VNAV systems, procedure N/A below -10°C or above 54°C. Simultaneous approach authorized with Rwly 2L/C. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 5500 and RNP 0.3 all Cats visibility to 6000.


MISSED APPROACH:
Climb to 1300 then
climbing right turn to
4000 direct LENON
and hold.

D-ATIS
135.1

NASHVILLE APP CON
118.4 360.7 (030°-196°)
119.35 372.0 (197°-029°)

NASHVILLE TOWER
118.6 257.8

GND CON
121.9 348.6

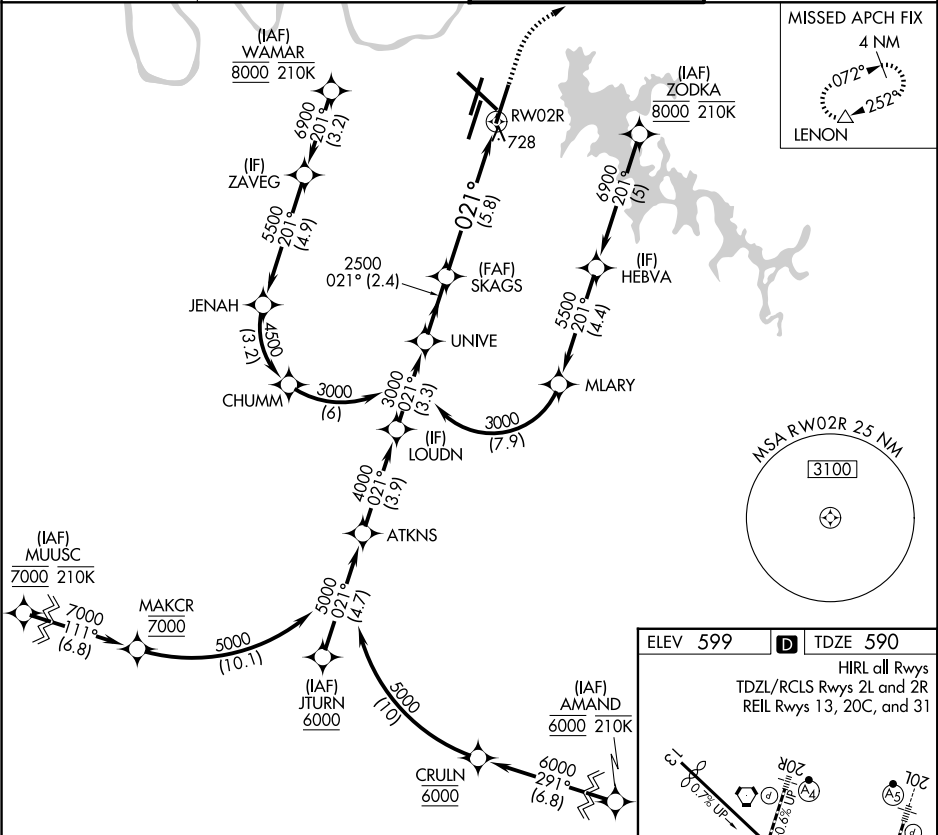

See planview for multiple IF locations.

UNIVE
3000

SKAGS
2500

RW02R

GP 3.00°
TCH 55

2500

2.4 NM

5.8 NM


1300

4000

LENON

CATEGORY	A	B	C	D
RNP 0.15 DA		938/30	348 (400- ⁵ / ₈)	
RNP 0.30 DA		994/40	404 (400- ³ / ₄)	

AUTHORIZATION REQUIRED

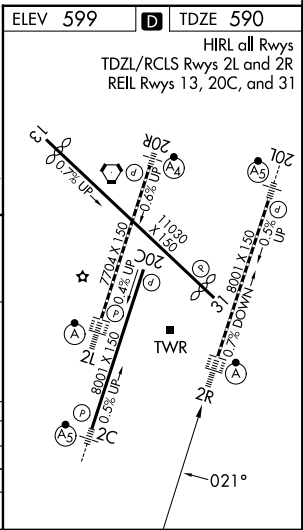

SE-1, 06 AUG 2026 to 03 SEP 2026

SE-1, 06 AUG 2026 to 03 SEP 2026