


NORCAL DEP CON
127.0 298.95
D-ATIS
133.775
CLNC DEL
121.1
CPDLC


RADAR required.

TOP ALTITUDE:
ASSIGNED BY ATC

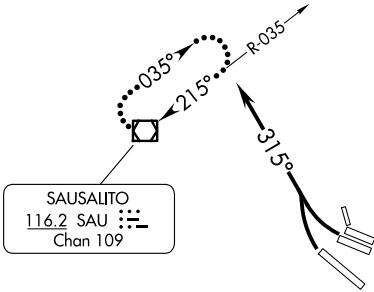

TAKEOFF MINIMUMS

Rwys 10L/R, 12, 15, 33: NA-Air Traffic.
Rwys 28L/R, 30: Standard with minimum climb of 375' per NM to 2000.



NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 28L/R and 30: Climbing right turn heading 315° for RADAR vectors to assigned route/fix. Maintain ATC assigned altitude. Expect filed altitude ten minutes after departure.

LOST COMMUNICATIONS: If not in contact with departure control after reaching 4000', proceed direct to SAU VOR/DME and hold on the SAU R-035. Climb in holding pattern to assigned altitude, then proceed to assigned fix/route.