


ATIS 134.925 397.9		[USAF]		60	120	180	240	300	360
TOWER		Rwy	Knots						
127.15 263.15		14	V/V(fpm)	2095	4190	6285	8380	10475	12570
SALT LAKE CITY		32	V/V(fpm)	4610	9220	13830	18440	23050	27660
DEP CON		ATC Climb Rate to 5200							
121.1 319.25									
CLOVER CON									
134.1 285.65									

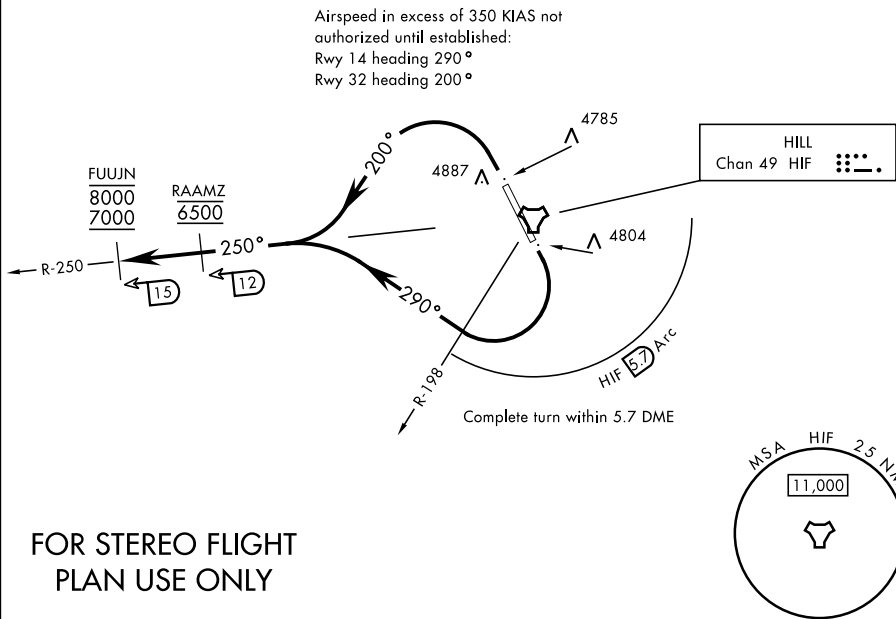

EMERG SAFE ALT 100 NM 15,700

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 14: Turn right heading 290°, remain within HIF TACAN 5.7 DME until passing the HIF R-198 and established on a heading greater than 256°, intercept HIF R-250 outbound prior to HIF 12 DME, cross RAAMZ at 6500, climb and maintain 7000 block 8000.

TAKEOFF RWY 32: Turn left heading 200°, intercept HIF TACAN R-250 outbound prior to HIF 12 DME, cross RAAMZ at 6500, climb and maintain 7000 block 8000.