

PANAMA CITY, FLORIDA

RNAV (GPS) RWY 14L

WAAS CH 71271 W14A	APCH CRS 138°	Rwy Idg 10,008 TDZE 14 Arpt Elev 17
--------------------------	------------------	---

(USAF)



TYNDALL AFB (KPM)

RNP APCH - GPS	ALSIF-1 	MISSED APPROACH: Climb to 600 then climbing left turn to 3000 direct NENCY and hold.
▼ * When ALS inop, increase RVR to 40, vis to 3/4 mile. ** When ALS inop, increase RVR to 45, vis to 7/8 mile. *** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CDE vis to 1 3/8 miles.		

ATIS★ 254.4	APP CON/DEP CON★ 119.775 317.45 BLW 5000' 124.15 338.35 ABV 5000'	TOWER★ 133.95 263.15	GND CON 121.9 259.3	ASR/PAR
----------------	---	-------------------------	------------------------	---------

For uncompensated Baro-VNAV systems, Procedure NA below 15°C (59°F) or above 54°C (130°F).

Average Cold Temperature based on standard -30.00°C ISA deviation.

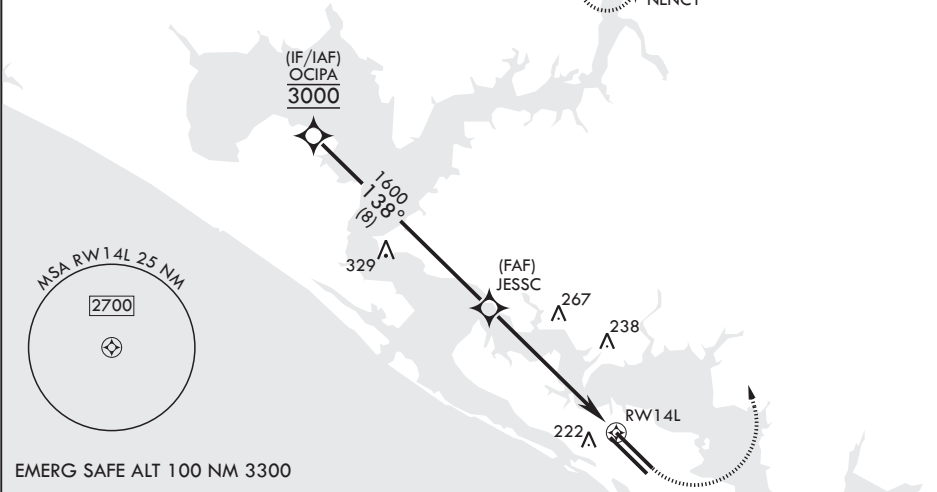

OCIPA 3000		JESSC 1600		RWY 14L 145		NENCY ELEV 17		TDZE 14	
GP 2.50° TCH 51		1.6 NM to RWY 14L		5.8 NM		138°		10,008 x 200	
CATEGORY		A		B		C		D	
LPV DA*		214/24		200		(200-½)		E	
LNAV/VNAV DA**		276/24 262 (300-½)		287/24 273 (300-½)		295/24 281 (300-½)		306/24 292 (300-½)	
LNAV MDA***		500/24 486 (500-½)		500/50		486		(500-1)	
CIRCLING		540-1 523 (600-1)		540-1½ 523 (600-1½)		580-2 563 (600-2)			
								HIRL all rwys Recommend Rwy 14L-32R for apch end engagement of A-Gear.	

PANAMA CITY, FLORIDA

30°04'N - 85°35'W

TYNDALL AFB (KPM)

Amdt 5 27NOV25

RNAV (GPS) RWY 14L

SE-3, 06 AUG 2026 to 03 SEP 2026

SE-3, 06 AUG 2026 to 03 SEP 2026