


WAAS CH 78212 W21A	APP CRS 211°	Rwy Ldg TDZE Apt Elev 9059 4452 4452
--	------------------------	--

RNAV (GPS) RWY 21
POCATELLO RGNL (PIH)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 7000 direct HUMBA and track 273° to SICOY and hold.
Circling NA southeast of Rwy 3-21. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to RVR 5500. *RVR 1800 authorized with use of FD or AP or HUD to DA.	AS	

ATIS 135.625	SALT LAKE CENTER 128.35 239.25	POCATELLO TOWER* 119.1 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

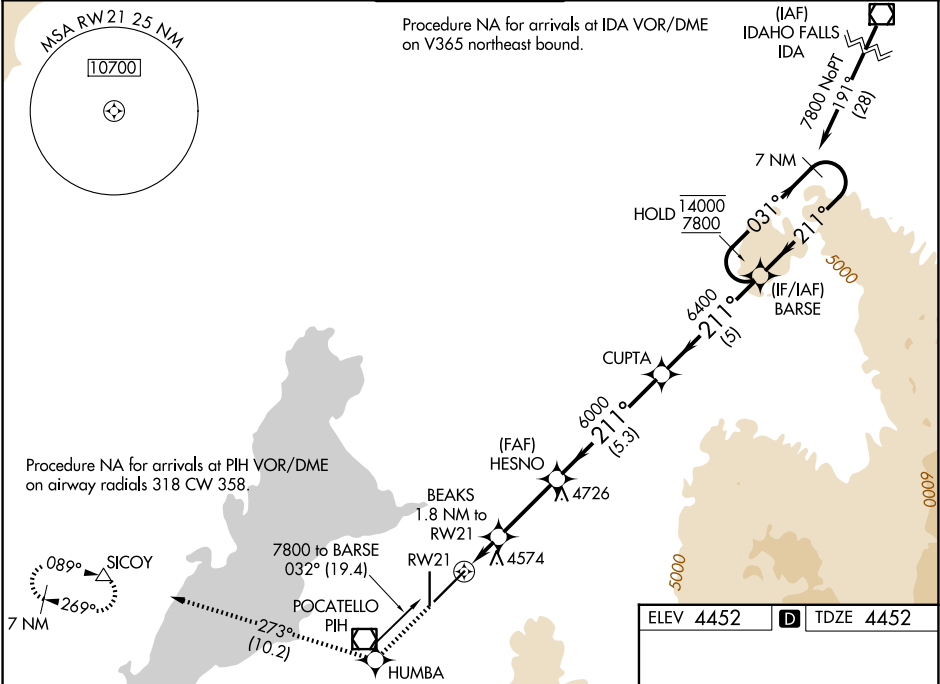

7000	HUMBA	tr 273°	SICOY	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 52).
BEAKS 1.8 NM to RW21	HESNO	CUPTA	BARSE	7 NM Holding Pattern
1 NM to RW21	6000	6400	031° 211°	14000 7800
5060	6000	GP 3.00° TCH 56		
1 NM	0.8 NM	3 NM	5.3 NM	5 NM
CATEGORY	A	B	C	D
LPV DA*		4652/24	200 (200-½)	
LNAV/VNAV DA		4835/35	383 (400-¾)	
LNAV MDA	4820/24	368 (400-½)	4820/35	368 (400-¾)
CIRCLING	4860-1 408 (500-1)	4920-1 468 (500-1)	4920-1½ 468 (500-1½)	5020-2 568 (600-2)
ELEV 4452	TDZE 4452			
7150 X 100	35			
211°				
AS				
TWR				
HIRL Rwy 3-21				
MIRL Rwy 17-35				
REIL Rws 3 and 17				

NW-1, 06 AUG 2026 to 03 SEP 2026

NW-1, 06 AUG 2026 to 03 SEP 2026