
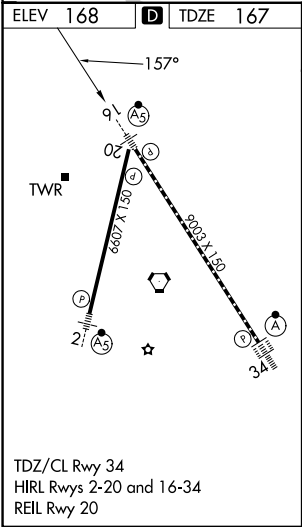


WAAS CH 72720 W16A	APP CRS 157°	Rwy Ldg TDZE 167 Apt Elev 168
--	------------------------	---

RNAV (GPS) Z RWY 16
RICHMOND INTL (RIC)

RNP APCH		MALSR	MISSED APPROACH: Climb to 2500 direct HAGLI and hold.	
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). For inop ALS increase LNAV/VNAV all Cats visibility to RVR 5400. ** RVR 1800 authorized with use of FD or AP or HUD to DA.				
ATIS		POTOMAC APP CON	RICHMOND TOWER	GND CON
119.15 263.025		126.4 282.375 (001°-185°) 126.75 307.2 (186°-360°)	121.1 257.8	121.9 348.6

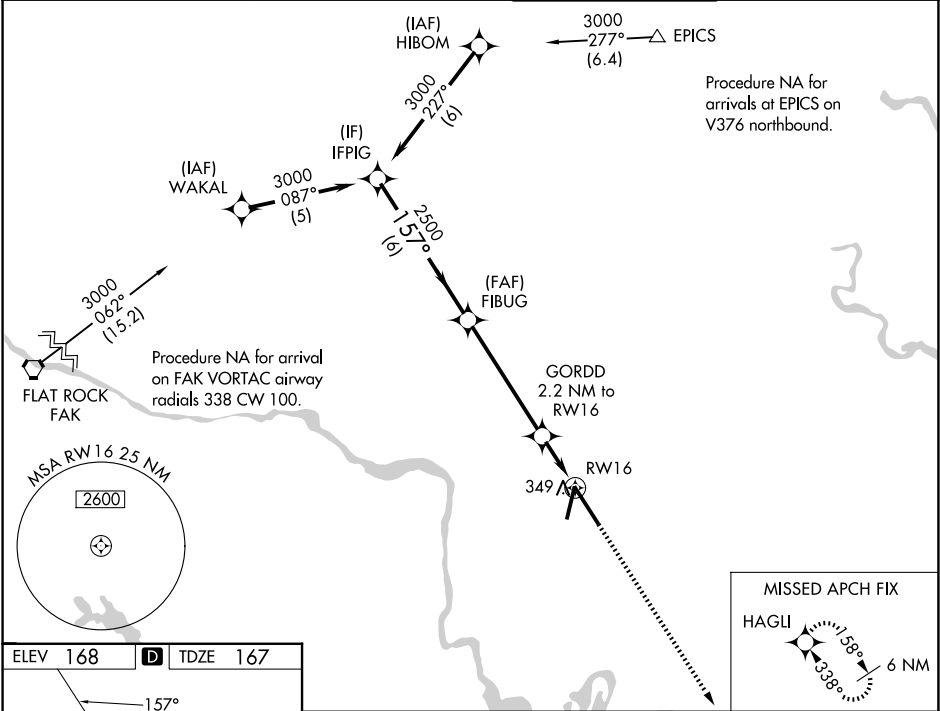

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 71).					2500 ↑	HAGLI ✦
IFPIG	FIBUG	GORDD 2.2 NM to RW16				
3000	2500	920*	*1.2 NM to RW16			
GP 3.00° TCH 54			RW16			
	6 NM	5 NM	1 NM	1.2 NM		
CATEGORY	A	B	C	D		
LPV DA **	367/24 200 (200-½)					
LNAV/ VNAV DA	504/31 337 (400-⅝)					
LNAV MDA	600/24 433 (500-½)		600/40 433 (500-¾)			
CIRCLING	660-1 492 (500-1)		700-1½ 532 (600-1½)		720-2 552 (600-2)	