

WAAS CH 50202 W03A	APP CRS 035°	Rwy Ldg 13000 TDZE 3667 Apt Elev 3671
--	------------------------	--



RNAV (GPS) RWY 3
ROSWELL AIR CENTER (ROW)

RNP APCH - GPS.

ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. When LPA altimeter setting not received, use Artesa altimeter setting; increase LPV DA to 3997 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 4067 feet and all visibilities ½ SM; increase all MDAs 80 feet and LNAV visibility Cat C ¾ SM, Cat D ½ SM and Circling visibility Cat D ½ SM. Baro-VNAV and VDP NA when using Artesa altimeter setting.

MISSED APPROACH: Climb to 6000 direct AQZED and hold.

ATIS	ROSWell APP CON *	ROSWell TOWER *	GND CON	CLNC DEL	UNICOM
128.45 306.2	119.6 239.0	118.5 (CTAF) 0 233.7	121.9 348.6	132.875 282.25	122.95

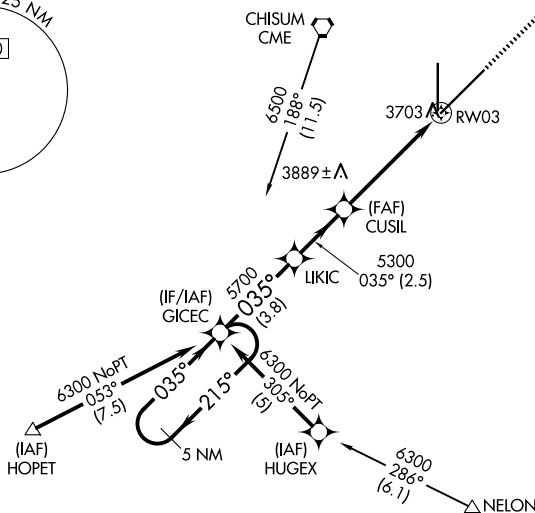

MISSED APCH FIX



5 NM Holding Pattern

6300 ← 215° 035° →

GP 3.00° TCH 50

GICEC

LKIC

CUSIL

1.3 NM to RW03

RW03

5700

5300

3.8 NM

2.5 NM

3.6 NM

1.3 NM

6000

AQZED

CATEGORY	A	B	C	D
LPV DA	3917- ³ / ₄ 250 (300- ³ / ₄)			
LNAV/VNAV DA	3987-1 320 (400-1)			
LNAV MDA	4140-1	473 (500-1)	4140-1 ¹ / ₄ 473 (500-1 ¹ / ₄)	4140-1 ¹ / ₂ 473 (500-1 ¹ / ₂)
CIRCLING	4140-1	469 (500-1)	4140-1 ¹ / ₂ 469 (500-1 ¹ / ₂)	4300-2 629 (700-2)

ELEV 3671

TDZE 3667