

WAAS
CH **45601**
W04A

APP CRS
041°

Rwy Ldg **11301**
TDZE **81**
Apt Elev **98**

RNAV (GPS) RWY 4R

SACRAMENTO MATHER (MHR)

RNP APCH - GPS.

▼


▲

Circling NA northwest of Rwy 4R-22L. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH: Climb to 3300 direct STNGR and hold.

*Missed approach requires minimum climb of 210 feet per NM to 2500.

ATIS 118.325	NORCAL APP CON 127.4 317.5	MATHER TOWER ★ 120.65(CTAF) 282.25	GND CON 121.85 307.9	UNICOM 122.95
------------------------	--------------------------------------	--	--------------------------------	-------------------------

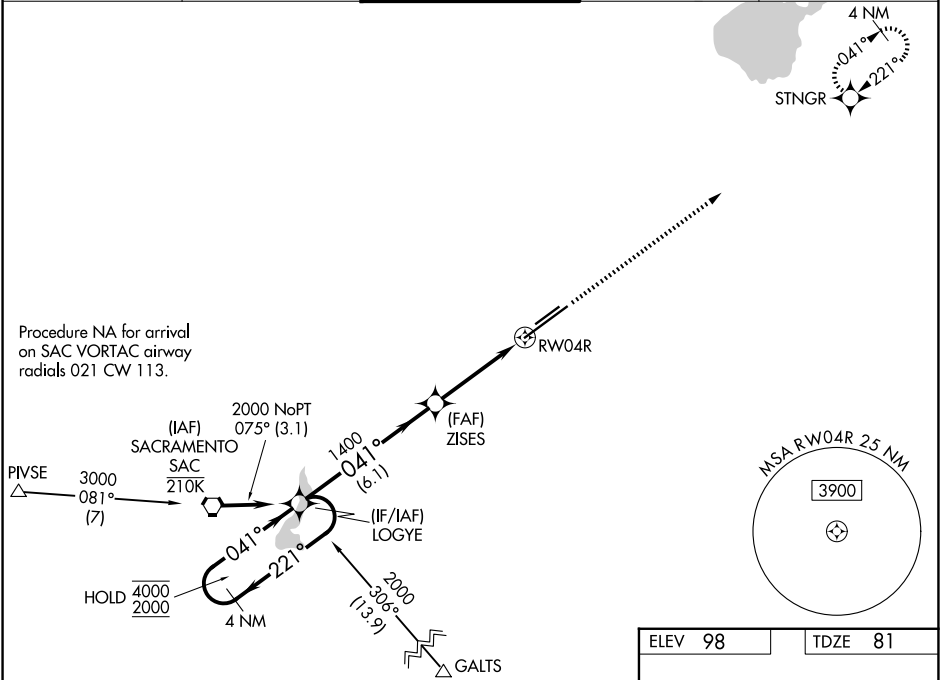

4 NM Holding Pattern

LOGYE

4000 ← 221°

2000 → 041°

GP 3.00°

TCH 51

3300 STNGR

ZISES

1400

1.2 NM to RWY04R

RWY04R

6.1 NM

2.8 NM

1.2 NM

CATEGORY	A	B	C	D
LPV DA*	331/40		250 (300-¾)	
LNAV/VNAV DA*	365/45		284 (300-⅞)	
LNAV MDA*	520/55	439 (500-1)	520-1¼	439 (500-1¼)
LNAV MDA	540/55 459 (500-1)	560/55 479 (500-1)	580-1⅓	499 (500-1⅓)
CIRCLING	560-1 462 (500-1)	580-1 482 (500-1)	600-1½ 502 (600-1½)	740-2 642 (700-2)

HIRL Rwy 4R-22L