


LOC/DME I-BNT	APP CRS	Rwy Ldg	9596
111.5	169°	TDZE	4222
Chan 52		Apt Elev	4231

ILS or LOC RWY 17
SALT LAKE CITY INTL (SLC)

RNP APCH-GPS. From WEBER or EKKHO.	MALSR	MISSED APPROACH: Climb to 10000 on FFU VORTAC R-342 to FFU VORTAC and hold.
DME or RADAR required. RADAR required for procedure entry at TUKTE.		
Simultaneous approach authorized. For inop ALS, increase S-ILS 17 Cat E visibility to RVR 4000, increase S-LOC 17 Cat C/D/E visibility to 1½ SM.		

D-ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER	GND CON
124.75 125.625	125.7 284.6	118.3 257.8	121.9 348.6

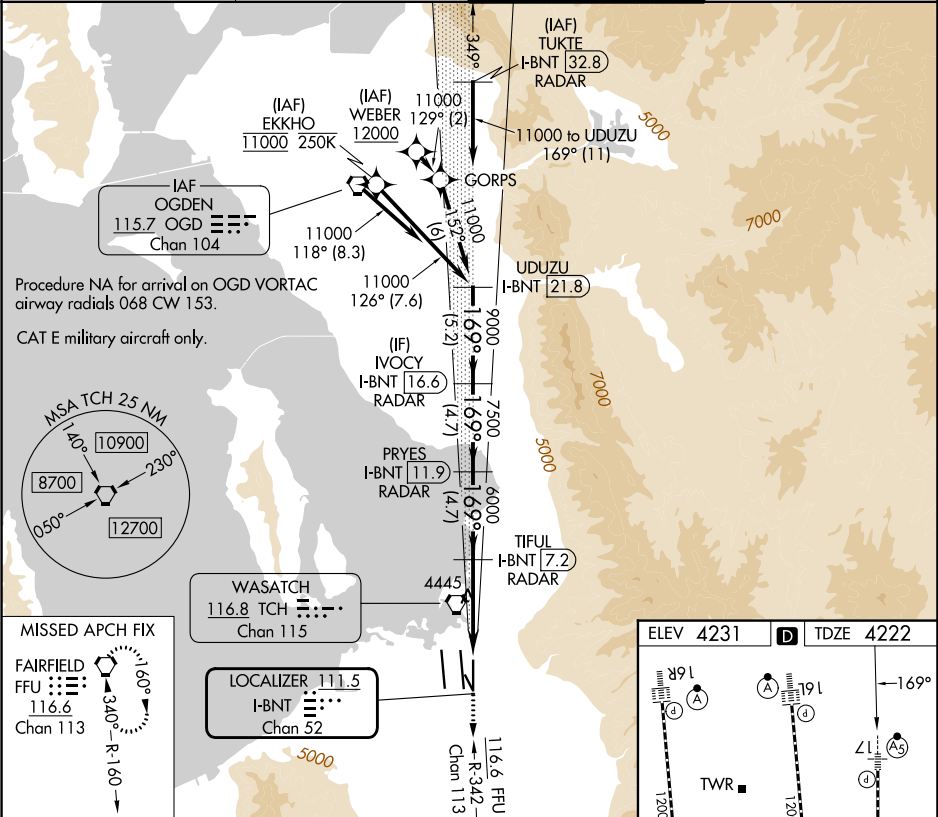

UDZUZU I-BNT 21.8					IVOCY I-BNT 16.6					PRYES I-BNT 11.9					TIFUL I-BNT 7.2					FFU I-BNT 1.8									
11000					9000					7500					6000					10000									
GS 3.00° TCH 55					5.2 NM					4.7 NM					4.7 NM					4.1 NM					1.3				
CATEGORY					A					B					C					D					E				
S-ILS 17					4422/18 200 (200-½)																								
S-LOC 17					4700/24 478 (500-½)										4700/50 478 (500-1)														

