

WAAS CH 77517 W03A	APP CRS 038°	Rwy Ldg TDZE 1917 Apt Elev 1919
--	------------------------	---

RNAV (GPS) RWY 3

SAN ANGELO RGNL/MATHIS FLD (SJT)

RNP APCH - GPS.

▼

▲


ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C.
For inop ALS, increase LPV Cat E visibility to RVR 4000, and LNAV/VNAV Cat E and LNAV Cat E visibility to RVR 6000. Circling NA for Cat E west of Rwy 18-36.
RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR

MISSED APPROACH:
Climb to 3800 direct LITAZ and hold.

ATIS 128.45 319.0	SAN ANGELO APP CON ★ 125.35 354.1	MATHIS TOWER ★ 118.3(CTAF) 284.7	GND CON 121.9 348.6	UNICOM 122.95
-----------------------------	---	--	-------------------------------	-------------------------

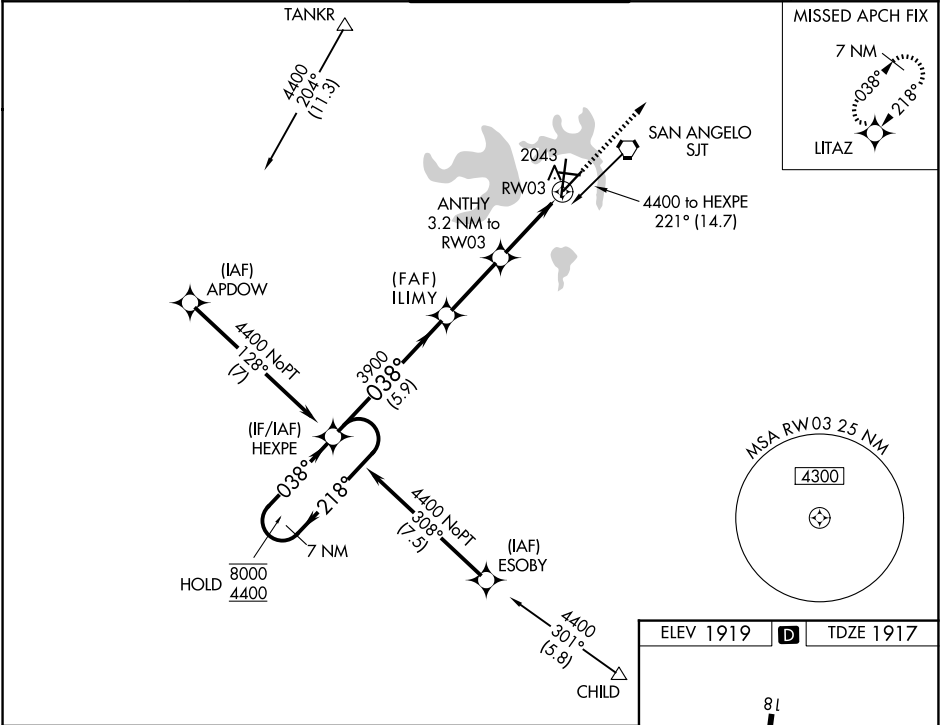

7 NM Holding Pattern					
HEXPE					
8000 ← 218° 4400 ← 038°					
GP 3.00° TCH 51					
5.9 NM 2.8 NM 2.2 NM 1 NM					
CATEGORY	A	B	C	D	E
LPV DA #	2117/24		200 (200-½)		
LNAV/VNAV DA	2323/35		406 (500-¾)		
LNAV MDA	2300/24	383 (400-½)	2300/35 383 (400-¾)		
CIRCLING	2360-1 441 (500-1)	2380-1 461 (500-1)	2500-1½ 581 (600-1½)	2700-2½ 781 (800-2½)	2700-2¾ 781 (800-2¾)

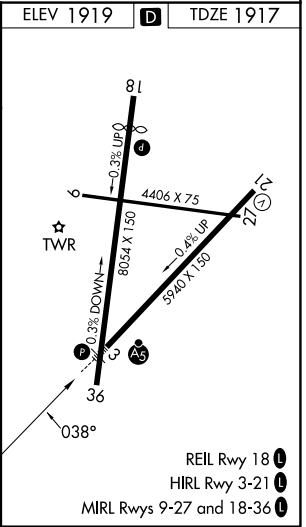

SC-3, 06 AUG 2026 to 03 SEP 2026

SC-3, 06 AUG 2026 to 03 SEP 2026