

WAAS
CH **77927**
W12A

APP CRS
121°

Rwy Ldg
TDZE **230**
Apt Elev **261**

RNAV (GPS) RWY 12


SANTA MARIA PUB/CAPT G ALLAN HANCOCK FLD (SMX)

⚠ Circling Rwy 2 NA at night. Baro-VNAV and VDP NA when using San Luis Obispo altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use San Luis Obispo altimeter setting and increase LPV DA to 489 feet; increase LNAV/VNAV DA to 622 feet and all visibilities to RVR 3500; increase all MDAs 60 feet and LNAV visibility Cat C/D to RVR 5500. For inop MALSR, increase LNAV Cat C/D visibility to 1½ mile. # RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Vandenberg altimeter setting.

MALSR

MISSED APPROACH:
Climb to 800 then
climbing left turn to
5000 direct MQO
VORTAC and hold.

ATIS 121.15	SANTA BARBARA APP CON★ 124.15 327.8	SANTA MARIA TOWER★ 118.3 (CTAF) 239.25	GND CON 121.9	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

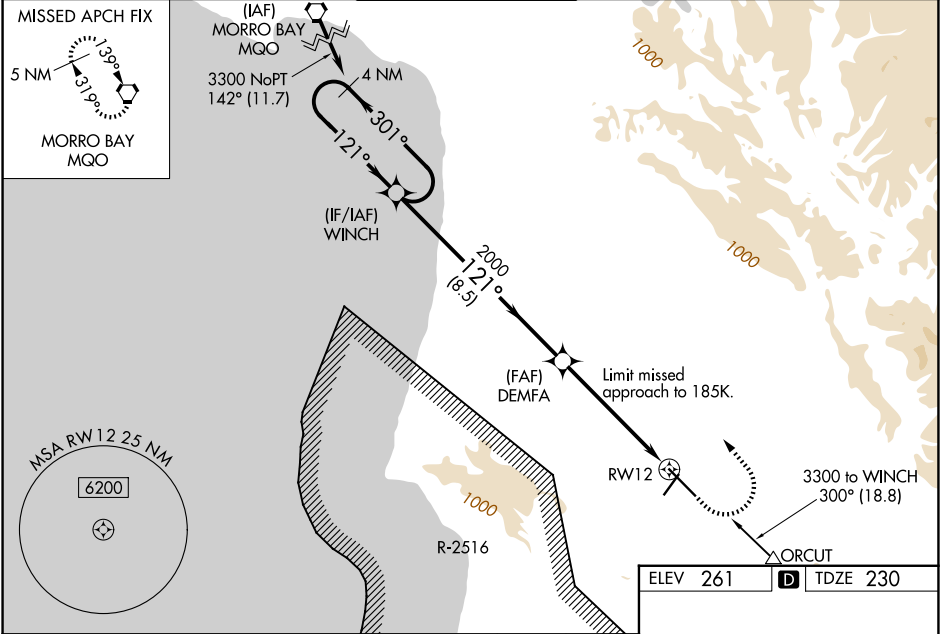

4 NM
Holding Pattern

WINCH

3300

301°

121°

121°

2000

DEMFA

800

5000

MQO

*1.3 NM to
RW12

*LNAV only

RW12

GP 3.00°
TCH 55

8.5 NM

4.2 NM

1.3 NM

CATEGORY

A

B

C

D

LPV DA#

430/24

200 (200-½)

LNAV/VNAV DA

563/32

333 (400-⅝)

LNAV MDA

680/24

450 (500-½)

680/50

450 (500-1)

CIRCLING

860-1
599 (600-1)

1000-1
739 (800-1)

1420-3
1159 (1200-3)

1540-3
1279 (1300-3)

HIRL Rwy 12-30

1

121°

AS

0.5% UP

20

5199 X 75

0.3% UP

800 X 150

0.6% DOWN

AS

TWR