

VOR GLJ 113.05	APP CRS 117°	Rwy Ldg TDZE Apt Elev	8004 230 261
--------------------------	------------------------	-----------------------------	---

VOR RWY 12
SANTA MARIA PUB/CAPT G ALLAN HANCOCK FLD (SMX)


A Circling Rwy 2 NA at night. When local altimeter setting not received, use SBP altimeter setting and increase all MDAs 60 feet and S-12 visibility Cat C/D to 1 1/4 SM. For inop ALS when using SBP altimeter setting, increase S-12 Cat C/D visibility to 1% SM. For inop ALS, increase S-12 Cat C/D visibility to 1% SM.

MALSR



MISSED APPROACH: Climb to 1000 then climbing left turn to 5000 direct MQO VORTAC and hold.

ATIS 121.15	SANTA BARBARA APP CON★ 124.15 327.8	SANTA MARIA TOWER★ 118.3 (CTAF) 0 239.25	GND CON 121.9	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

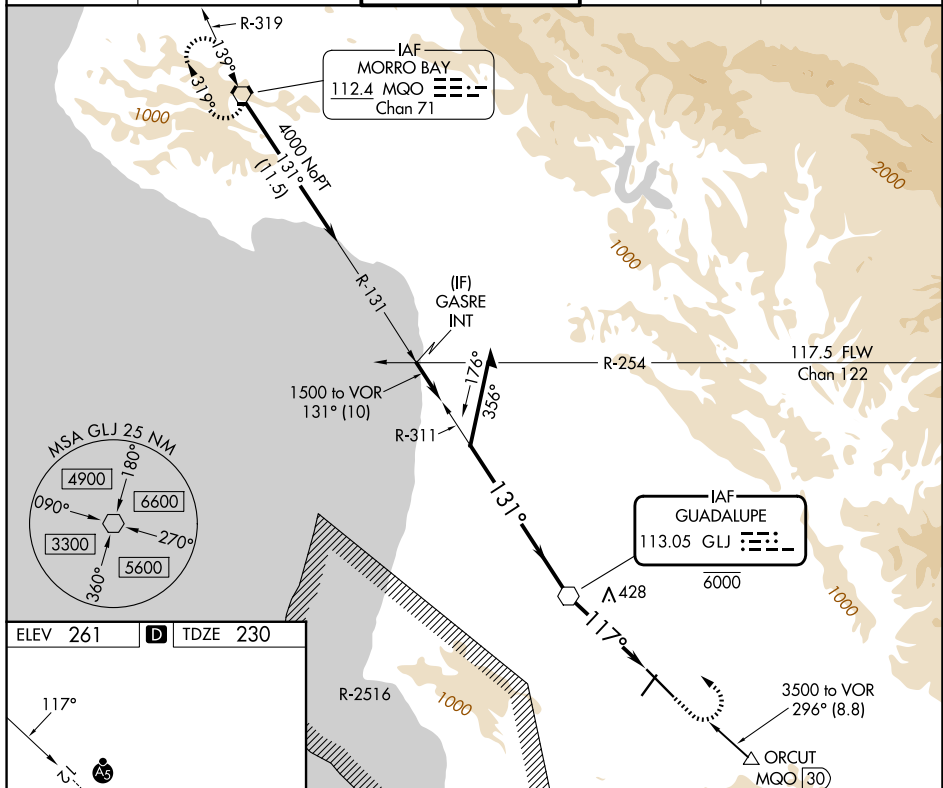

HRL Rwy 12-30

FAF to MAP 3.9 NM					
Knots	60	90	120	150	180
Min:Sec	3:54	2:36	1:57	1:34	1:18

Diagram illustrating a 3D printed part with a 3.9 NM dimension and various angles (311°, 131°, 117°, 3.00°). The part is labeled "GLJ VOR" and "TCH 55". A table below the diagram shows the material properties for different categories.

CATEGORY	A	B	C	D
S-12	740/24 510 (500-½)		740/55 510 (500-1)	
CIRCLING	860-1 599 (600-1)	1000-1 739 (800-1)	1420-3 1159 (1200-3)	NA