

WAAS CH 69435 W15A	APP CRS 149°	Rwy Ldg TDZE Apt Elev	8014 166 166
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 15


CRAIG FLD (SEM)

▼ Baro-VNAV NA when using Montgomery altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

▲ VDP NA with Montgomery altimeter setting. When local altimeter setting not received, use Montgomery altimeter setting and increase all DA 78 feet, all MDA 80 feet, LPV all Cats visibility $\frac{3}{8}$ mile, LNAV/VNAV all Cats visibility and LNAV Cats C and D visibility $\frac{1}{4}$ mile, Circling Cat C visibility $\frac{1}{2}$ mile and Cat D visibility $\frac{1}{4}$ mile.

MISSED APPROACH:
Climb to 3100 direct
CADIP and hold.

AWOS-3PT 119.15	MONTGOMERY APP CON ★ 124.0 363.025	CRAIG TOWER★ 120.85	GND CON 121.675	UNICOM 122.7 (CTAF) 0
---------------------------	--	-------------------------------	---------------------------	---------------------------------

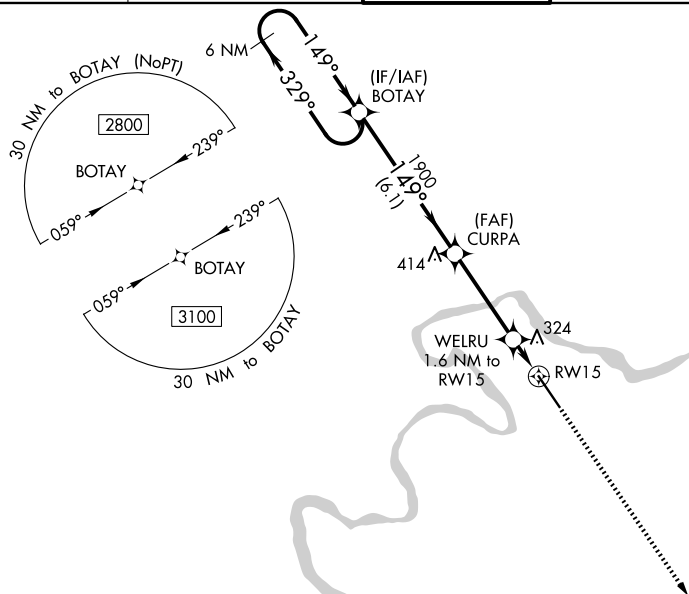

ELEV 166		TDZE 166
----------	--	----------

