
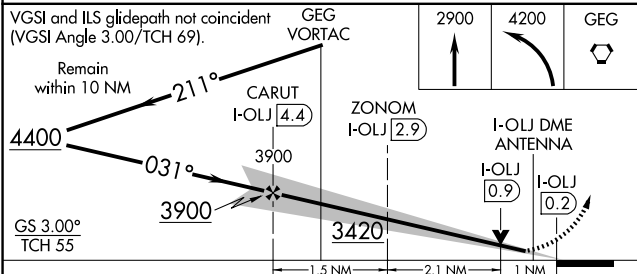


|                                                 |                        |                                                     |
|-------------------------------------------------|------------------------|-----------------------------------------------------|
| LOC/DME I-OLJ<br><b>111.1</b><br>Chan <b>48</b> | APP CRS<br><b>031°</b> | Rwy Ldg<br>TDZE <b>2385</b><br>Apt Elev <b>2385</b> |
|-------------------------------------------------|------------------------|-----------------------------------------------------|

ILS or LOC RWY 3  
SPOKANE INTL (GEG)

|                                                                |         |                                                                                                                            |
|----------------------------------------------------------------|---------|----------------------------------------------------------------------------------------------------------------------------|
| DME required for localizer only.                               | ALSIF-2 | MISSED APPROACH: Climb to 2900 then climbing left turn to 4200 direct GEG VORTAC and hold, continue climb-in-hold to 4200. |
| For inop ALS, increase S-LOC 3 Cat C/D visibility to RVR 5500. |         |                                                                                                                            |

|                                |                                                                                        |                                     |                               |
|--------------------------------|----------------------------------------------------------------------------------------|-------------------------------------|-------------------------------|
| ATIS<br><b>124.325 254.375</b> | SPOKANE APP CON<br><b>123.75 282.25</b> (205°-025°)<br><b>133.35 263.0</b> (026°-204°) | SPOKANE TOWER<br><b>118.3 278.3</b> | GND CON<br><b>121.9 348.6</b> |
|--------------------------------|----------------------------------------------------------------------------------------|-------------------------------------|-------------------------------|

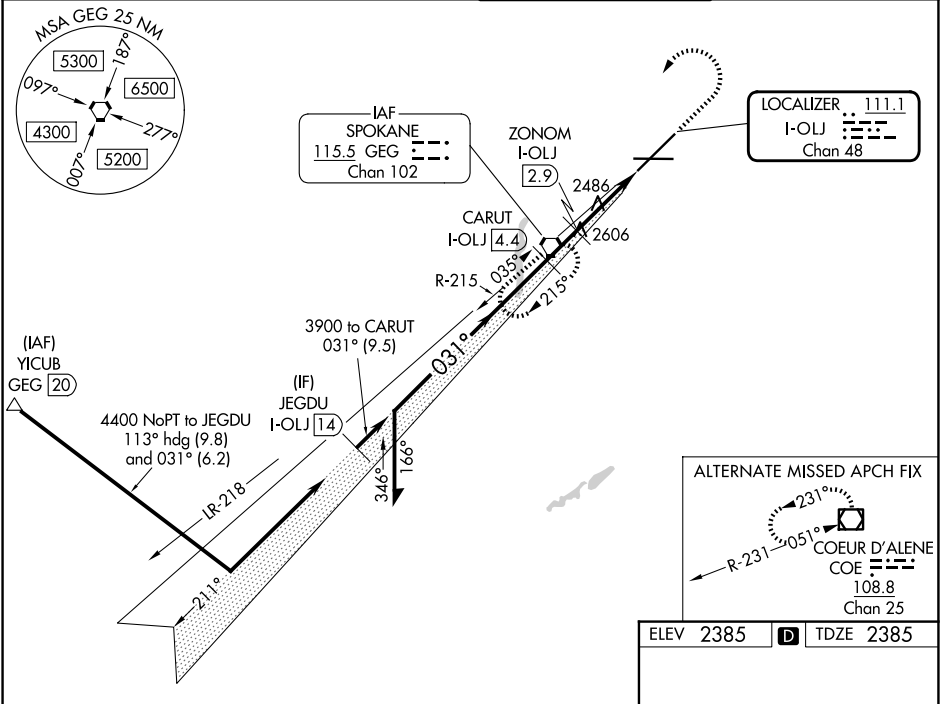

| CATEGORY | A                     | B                     | C                       | D                      |
|----------|-----------------------|-----------------------|-------------------------|------------------------|
| S-ILS 3  | 2585/18 200 (200-½)   |                       |                         |                        |
| S-LOC 3  | 2780/24               | 395 (400-½)           | 2780/35                 | 395 (400-¾)            |
| CIRCLING | 2960-1<br>575 (600-1) | 2980-1<br>595 (600-1) | 3180-2¼<br>795 (800-2¼) | 3380-3<br>995 (1000-3) |

